

Uptmate Technology Co., LTD

U-Poster1.0 Signage Content Publishing Software

User Manual

Software Version:V1.0

Revision

Item	Issues Dates	Description	Actions	Date
1	2013/10/04	Beta ReleaseEdition		
2	2013/11/08	Add Dropbox Function		
3	2013/12/17	Revised for New Icon..		
4	2013/12/30	Revised for local Webpage		
5	2014/1/27	Revised for Dropbox Function		
6	2014/2/10	Add Dropbox setting in UA-7000		
7	2014/3/17	Revised for P24/P37/P38		
8	2014/4/2	Revised for minor mistakes		
9	2014/4/28	Revised for Dropbox status & apk mode		
10	2014/8/20	Revised for Video In		
11	2014/9/4	Revised for Analog Clock Setting & Portrait Orientation		

Uptmate Technology Co., LTD

幸楷科技股份有限公司

U-Poster1.0

(Signage Content Publishing Software)

User Manual

Software Version: V1.0

Hardware Model: UA-7000/UA-7100/UA-7200

(Advantech UBC-DS31/RSB-4410)

Department	RD/PM
Prepared by	
Approved by	

Uptmate Technology Co., LTD

Copyright

This technical document, including photographs and software, is protected under international copyright laws, with all rights reserved. Neither this manual, nor any of the materials contained herein, may be reproduced without written consent of the company or their respective owners.

© Copyright Sep. 2010

Disclaimer

The information in this document is subject to change without notice. The manufacturer makes no representations or warranties, with respect to the contents hereof, and specifically disclaims any implied warranties of merchantability or fitness for any particular purpose. The manufacturer reserves the right to revise this publication and to make changes from time to time in the content hereof without obligation of the manufacturer to notify any person of such revision or changes.

Trademark Recognition

The product names mentioned in this compatibility test report are the properties of their respective owners and are acknowledged.

Office:

Address: 16F-2., No.736, Zhongzheng Rd.,
Zhonghe Dist., New Taipei City 23511, Taiwan (R.O.C.)
Tel: +886-2-82278036
Fax: +886-2-82278048

Service Centers

Taiwan	sales@uptmate.com.tw
---------------	--

Uptmate Technology Co., LTD

Catalog

1. ABOUT U-POSTER	6
2. U-POSTER INSTALLATION.....	6
3. STARTING U-POSTER.....	9
4. USER INTERFACE INTRODUCTION.....	9
5. START WITH WIZARD.....	10
6. QUICK GUIDE.....	13
7. EDITING DIGITAL SIGNAGE.....	14
7.1 SETTING.....	15
7.2 LAYOUT EDITOR	17
7.3 PLAYLIST.....	20
7.4 SIGNAGE WIDGET – VIDEO I /VIDEO II.....	22
7.5 SIGNAGE WIDGET -- MARQUE I & MARQUEE II	25
7.6 SIGNAGE WIDGET -- WEB	28
7.7 CLOCK	28
7.8 WEATHER	29
7.9 SIGNAGE WIDGET –INFOBOARD (BULLETIN BOARD)	30
7.10 SIGNAGE WIDGET – SLIDESHOW I ~ SLIDESHOW IV.....	31
7.11 SIGNAGE WIDGET – LOGO & BACKGROUND	32
7.12 SIGNAGE WIDGET – MUSIC	33
8. PUBLISHING DIGITAL SIGNAGE	34
8.1 HOT KEY AREA.....	34
9. FTP DETAIL SETTING AND INFORMATION.....	35
9.1 LOCAL FTP SETTING	35
9.2 UPLOAD PROJECT AND FILES TO FTP.....	36
9.3 OTHER FTP MANAGEMENT	38
10. PUBLISH VIA DROPBOX.....	39

Uptmate Technology Co., LTD

10.1 U-POSTER UPLOAD (TO DROPBOX).....	39
10.2 DROPBOX SETTING IN PLAYER (UA-7200)	43
10.2.1 ENABLE DROPBOX AT INSTALLATION	43
10.2.2 UNLINK FROM DROPBOX.....	46
10.2.3 CHANGING DROPBOX ACCOUNT.....	47

Confidential

First of all, we are glad to introduce U-Poster1.0 to you. This document will help you to understand this powerful signage content publish software which is designed for UA-7X00(UBC-DS31/RSB-4410) series. Please enjoy it!

1. About U-Poster

U-Poster is the internet signage content publishing software which designs for UptmateUA-7X00(UBC-DS31/RSB-4410) series FHD signage player. U-Poster is the PC software that must install and execute in a Windows PC. After installation, users can use this U-Poster to edit the configurations (such as layout, text ...) and playlist for signage players (UA-7200).After that, U-Poster can publish these configurations with content to ftp server for players to sync. U-Poster is also built-in ftp server that does not need to prepare additional content server. That will be simple and easy for SMB owners. In conclusion, Uptmate UA-7200(Advantech UBC-DS31/RSB-4410) with U-Poster will be the most simple turkey solution for SMB signage applications.

2. U-Poster Installation


2.1 Execute "Setup.exe" in U-Poster Release

2.2 Follow the instruction during the installation


2.3 Click “Allow access” in Windows Firewall Security Alert



2.4 Click “Next” for next step

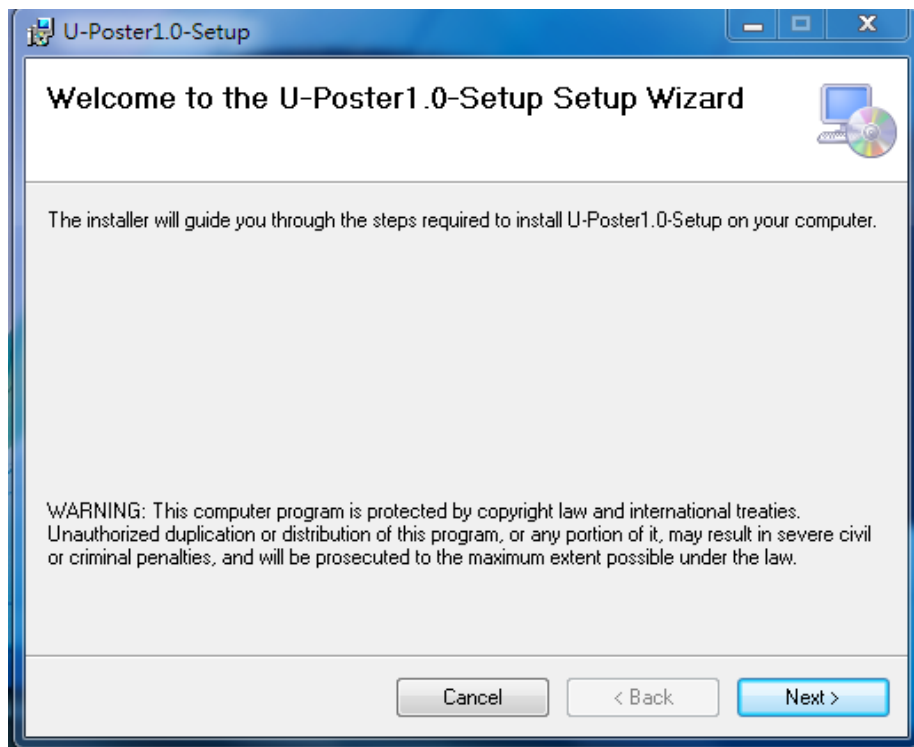


2.5 Select “Yes” or “No” for built-in ftp or not

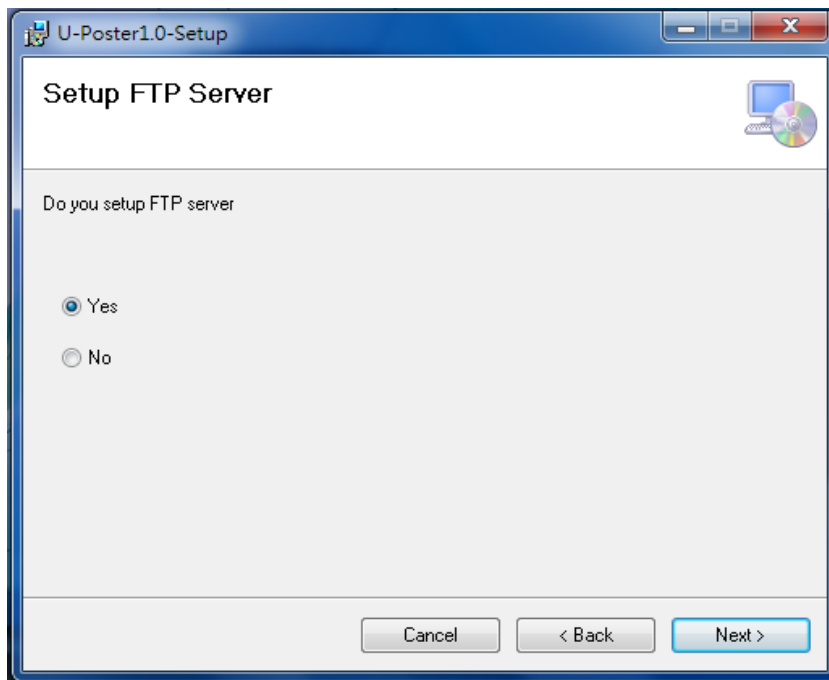

Maybe you need to enable the ftp Port in your Firewall.



2.6 Click "Next" for Default folder

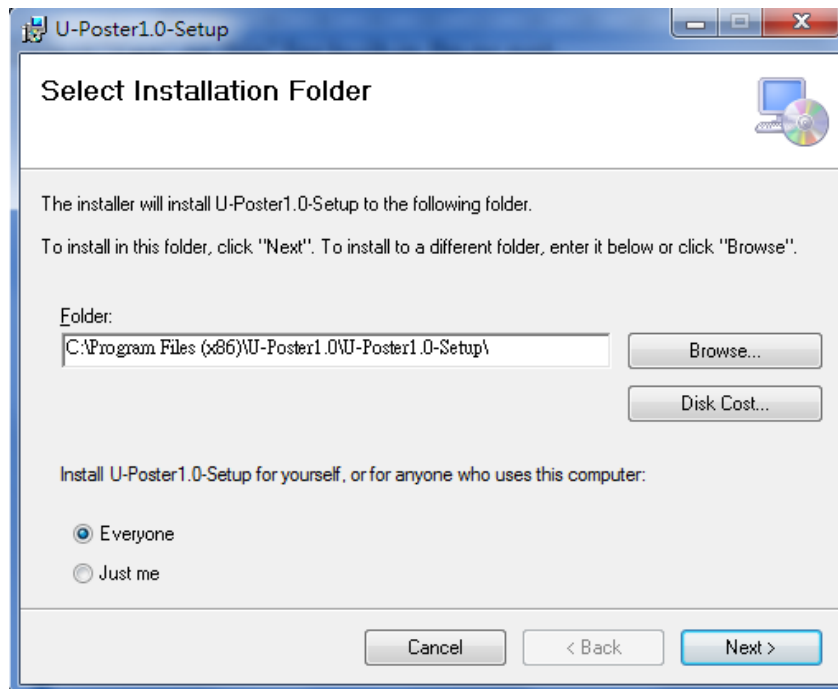

2.7 After confirmation, you will get an icon on desktop after installation.

3. Starting U-Poster


Click “U-Poster” icon to execute U-Poster



4. User Interface Introduction

There are several function areas in U-Poster as below:

- Pull Down Menu and File Service
- Function Key Area
- Configuration Area
- Playlist Information Area

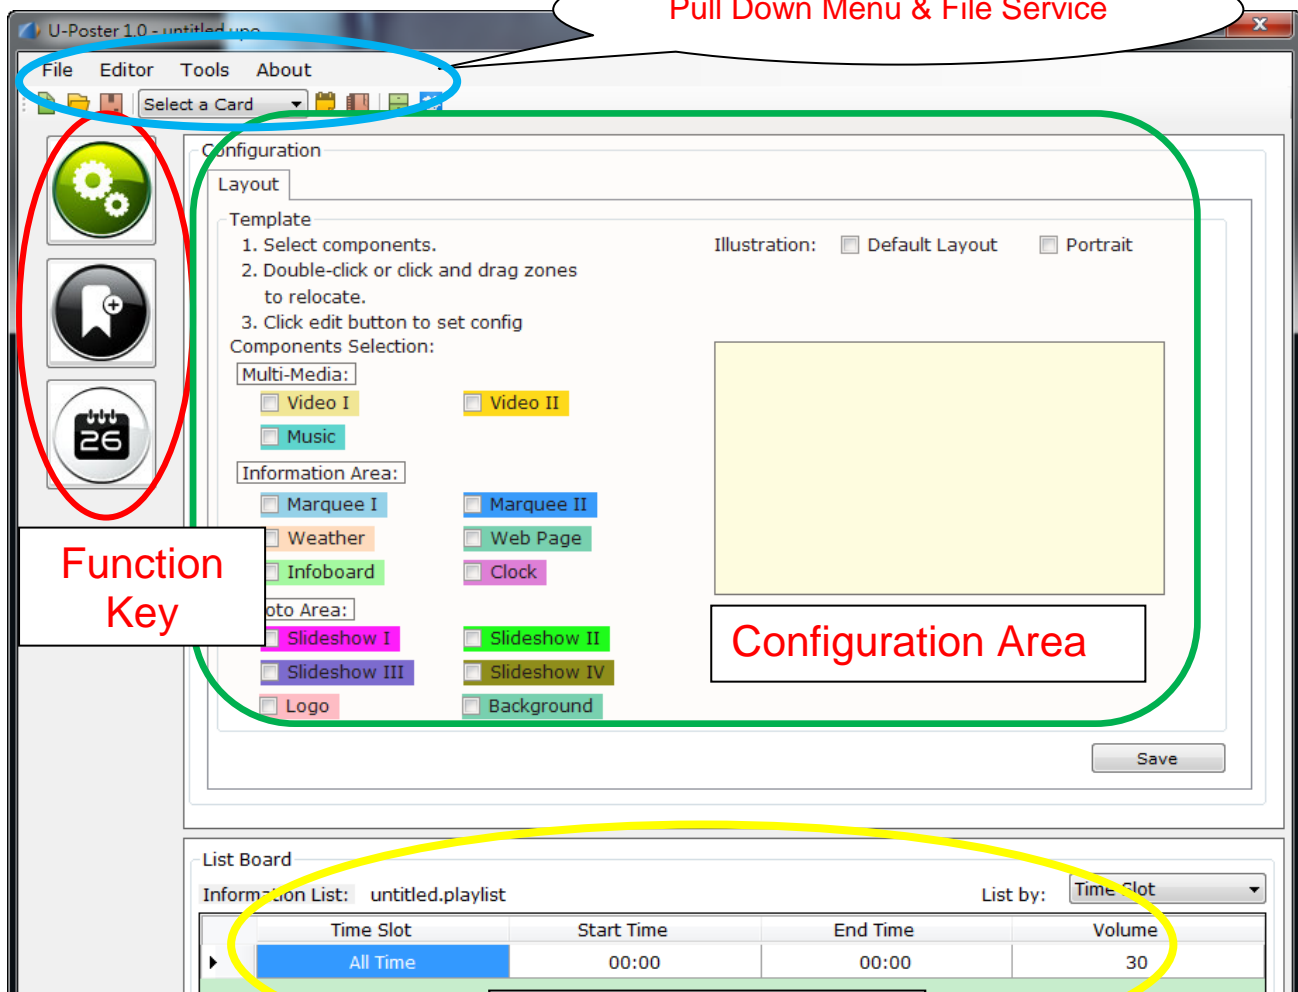


5. Start with Wizard

It will show Wizard to teach you how to setup U-Poster step by step when 1st time to execute the U-Poster software. You can disable it if by clicking "Don't show wizard again". And this Wizard will help you setup all the configurations one by one.


Please Click "Next" if want to setup through Wizard and "Close" if not. For the 1st time to use, the last step is to export all the content and configuration into the SD card for initial setting. After that, users can use internet to transfer the content next time.

Step 0: Welcome --Wizard

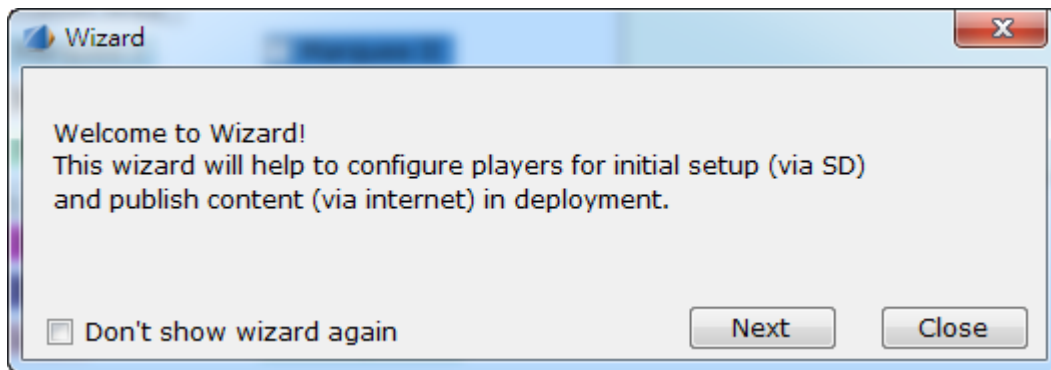


Step 1: Layout Design--Wizard

The 1st step is to define Layout. You can select "Default Layout" or "Portrait" and it will display the Layout Editor page.

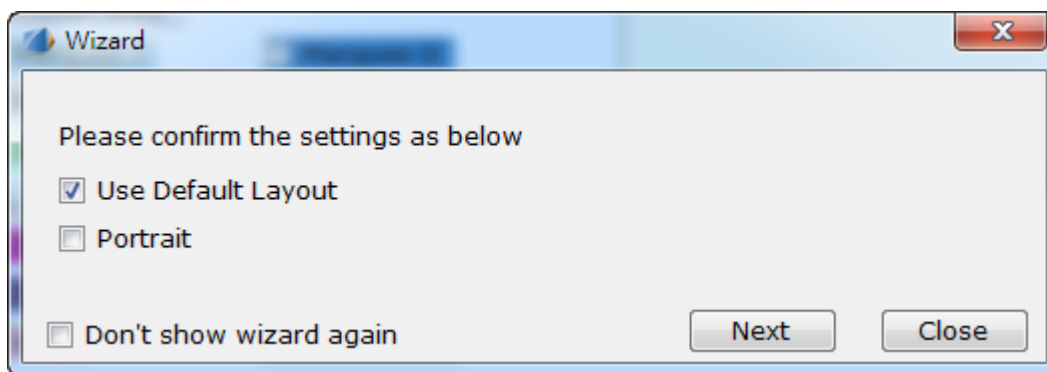

Step 2: Power On/Off Setting--Wizard

After Layout Setting, Wizard will guide you to setup "Power On/ Off" Schedule if necessary.

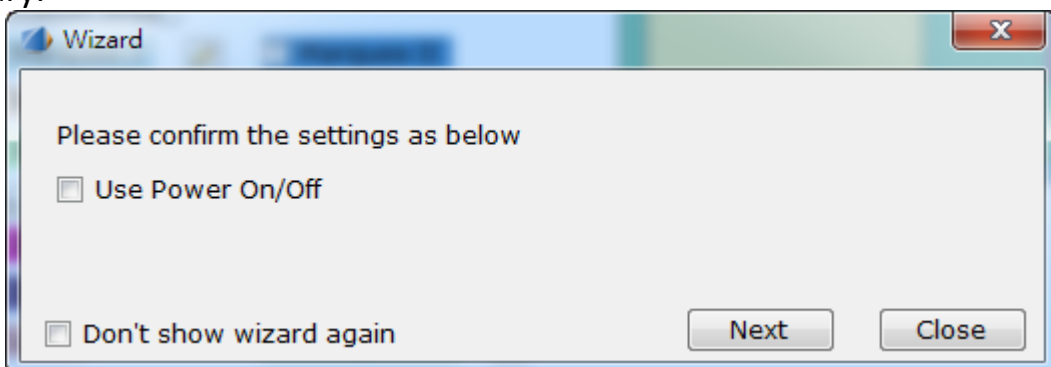

Step 3: Content Deployment --Wizard

After Power On/ Off Setting, Wizard will guide you to setup how to deploy the

content. There are three ways to deploy the content. They are 1. Export to SD, 2. By ftp Server and 3. By Dropbox. Please refer to the following:

1. Save Project:


If don't transfer content by internet. Export to SD card and "Save Project"

2. FTP Setting:

Content Transferring by FTP Server


3. Dropbox Setting:

Content Transferring by Dropbox

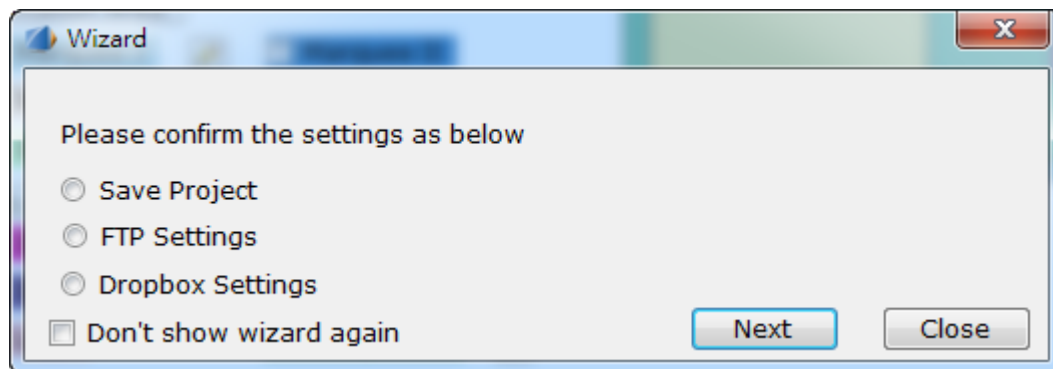

Step 4: Export to SD for initial setting disk --Wizard

This is the last step to setup! If this is the 1st time to setup the players, you need to export these content and configurations to SD card. If it's not the 1st time, you can ignore this step. Click "Close" and finish the setup of U-Poster.

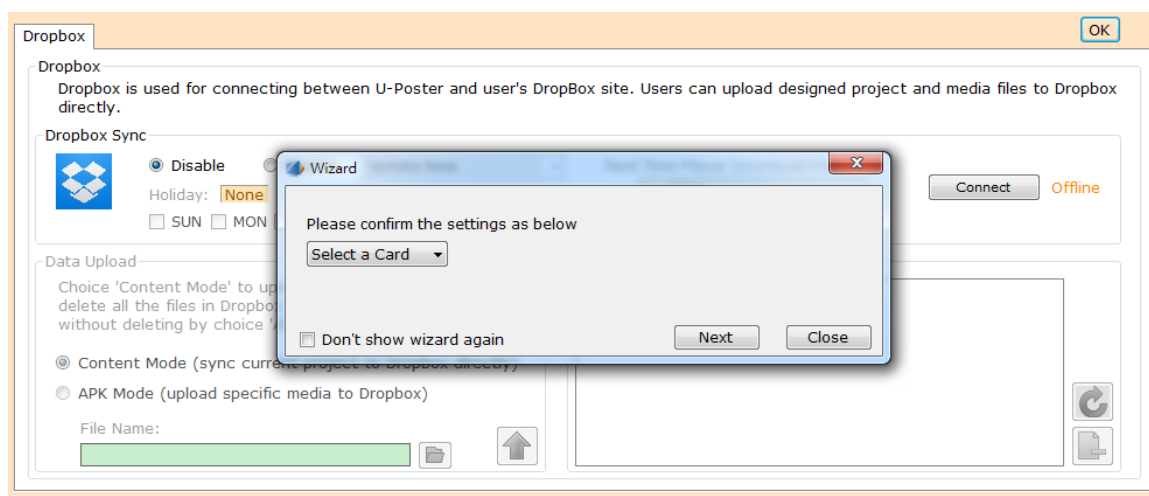

6. Quick Guide

There will need to prepare a sample disk (SD) during installation. Dropbox or FTP connection information (such as login account and password) is a must. After that, UA-7000 will sync with ftp (built-in or external) server at (shut-down) or Dropbox(immediately) for all the contents and configuration automatically.

Basic Procedures

Step 1:

Export sample disks with ftp information at installation

Step 2:

Edit the configuration and playlist

Step 3:

Publish to ftp server (local ftp or external ftp) or Dropbox

Step 4:

UA-7000 Series will sync with ftp automatically at shut down or Dropbox immediately.

Step 5:

UA-7000 will play new layout with new content at next boot.

Step 1:
Export sample disks
(ftp information is must
for ftp sync.)

Step 3:
Publish to ftp
or Dropbox

Step 2:
Configuration

The screenshot displays the configuration interface of the U-Poster1.0 software. It features several panels: 'Power Control' with 'Auto Start' (ON/OFF), 'Start Time', and 'End Time' settings; 'Device Volume And Time Zone' with a volume slider (set to 30) and a time zone dropdown (set to Asia/Taipei); and 'Set FTP Information' with 'Disable' and 'Enable' radio buttons, a 'local FTP' field, and an 'ftp://' field. A yellow box highlights the left sidebar containing three icons: a gear, a document with a plus sign, and a calendar. A blue box highlights the 'Set FTP Information' panel. A red box highlights the 'Save' button at the bottom right.

**Setting ftp information for
players to sync.
It is a MUST!!**

7. Editing Digital Signage

◆ Configuration

This portion will let you know how to set all the configurations of different display zones. After configuration, you can apply to all the signage players via ftp server.

Basic Setting

Layout


Playlist



7.1 Setting

◆ Power Control Setup

- Select On/Off to enable Auto Power On/Off Function
- Set Start Time and End Time for Power On and Power Off
- Set “Time Zone” for the players

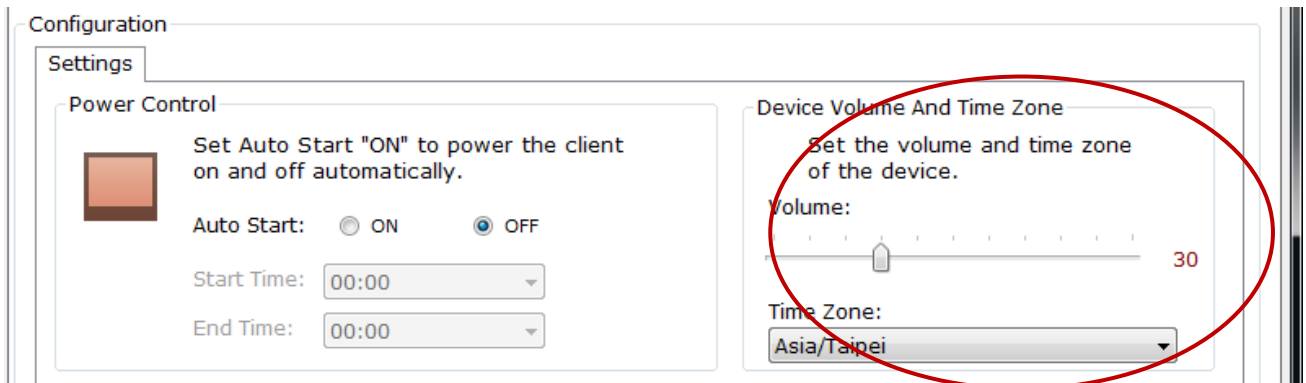

◆ Volume Control

Set the players volume

◆ FTP Setting

U-Poster is designed in a dedicate FTP called “local FTP”. And U-Poster also allows publishing to external FTP. The FTP setting includes

■ “Enable” or “Disable”

“Enable” or “Disable” ftp Sync. of UA-7000 series.

■ Sync. Mode

Auto mode means “Sync the content automatically before shut down”.

■ FTP information

- ◆ ftp URL link (Can choose History from above)
- ◆ Port (Default: 21)
- ◆ Username
- ◆ Password

■ Local FTP setting

■ Select Local FTP

■ Select an account: Default is "Guest".

■ Please refer to "8.1"for creating ftp account in "Local FTP".

Set FTP Information



Set the ftp information for clients to sync.
Note: FTP sync will auto start when check "Enable".

☒ Disable ☐ Enable

Mode: Auto Mode only

Local FTP

User Name:

ftp:// :

Password:

Save

7.2 Layout Editor

There are two examples as illustration templates. One is landscape and the other is portrait. If not suitable, you can create your own layout. The procedures are:

Step 1: Select the signage components

The Components we provided:

Multi-Media

1. Video I
2. Video II
3. Music

Information Zone

4. Marquee I
5. Marquee II
6. Weather Zone
7. Webpage
8. Inform Board
9. Clock

Photo Area

10. Slideshow I
11. Slideshow II
12. Slideshow III
13. Slideshow IV
14. Background
15. Logo

Configuration

Layout

Template

1. Select components.
2. Double-click or click and drag zones to relocate.
3. Click edit button to set config

Illustration: ☒ Landscape ☐ Portrait ☒ Default Layout

Components Selection:

Multi-Media:

- ☒ Video I  ☒ Video II 
- ☐ Music

Information Area:





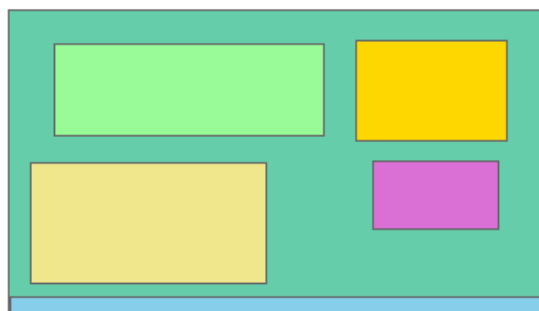
- ☒ Marquee I  ☐ Marquee II
- ☐ Weather ☐ Web Page
- ☒ Infoboard  ☒ Clock 

Photo Area:

- ☐ Slideshow I ☐ Slideshow II
- ☐ Slideshow III ☐ Slideshow IV
- ☐ Logo ☒ Background 



Bottom

Preview

Save

Configuration

Layout

Template

1. Select components.
2. Double-click or click and drag zones to relocate.
3. Click edit button to set config

Illustration: ☐ Landscape ☒ Portrait ☒ Default Layout

Components Selection:

Multi-Media:

- ☒ Video I  ☒ Video II 
- ☐ Music

Information Area:






- ☒ Marquee I  ☐ Marquee II
- ☐ Weather ☐ Web Page
- ☒ Infoboard  ☒ Clock 

Photo Area:

- ☐ Slideshow I ☐ Slideshow II
- ☐ Slideshow III ☐ Slideshow IV
- ☐ Logo ☒ Background 

☒ Bottom

☐ Bottom




Preview

Save

Step 2: Relocate and Resize by Drag

You can use the mouse to drag and resize the zone. And you can get the position information(X,Y) and Size(Width, Height) as below:

Illustration: ☒ Default Layout ☐ Portrait

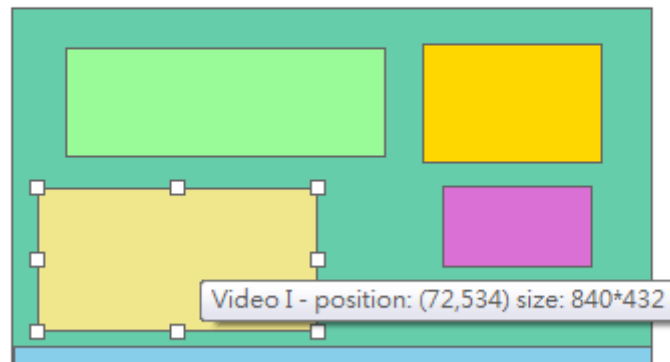

And you can use the size information to prepare content size.

Step 3: Double Click to set the size of each module

Double Click can let you edit the size and position more exactly.

Layout

Template

1. Select components.
2. Double-click or click and drag zones to relocate.
3. Click edit button to set config

Components Selection:

Multi-Media:

- ☒ Video I ☒ Video II
- ☐ Music

Information Area:

- ☒ Marquee I ☐ Marquee II

- ☐ Weat

- ☒ Infob

Photo Area


- ☐ Slides

- ☐ Slides

- ☐ Logo

- ☒ Background

Illustration: ☒ Default Layout ☐ Portrait

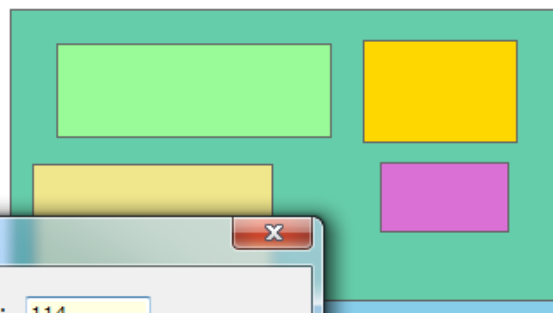

Position and Size of Infoboard


Position: X: 156 Y: 114

Size: Width: 960 Height: 330

OK


Step 4: Detail Setting of Each Widget

Click the “Pencil Icon” for detail configurations. Please refer to 6.4 for setting each module.

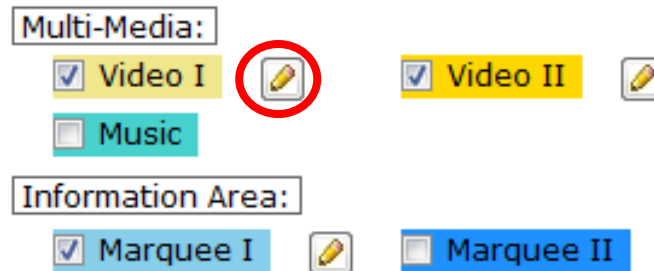


Step 4: Preview

Click “Preview”, you can get a demo screenshot as below:

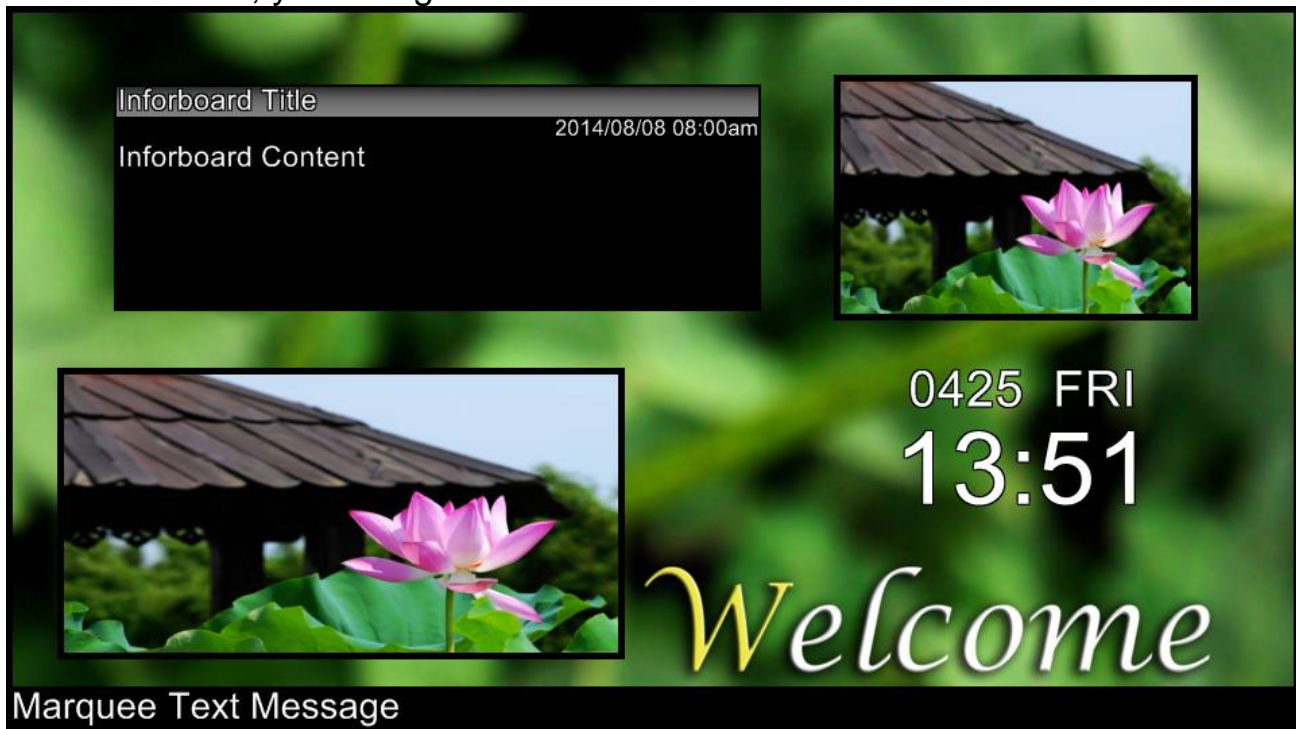


7.3 Playlist

Set Schedule and Volume of each Time Slot (Default “All Time”)

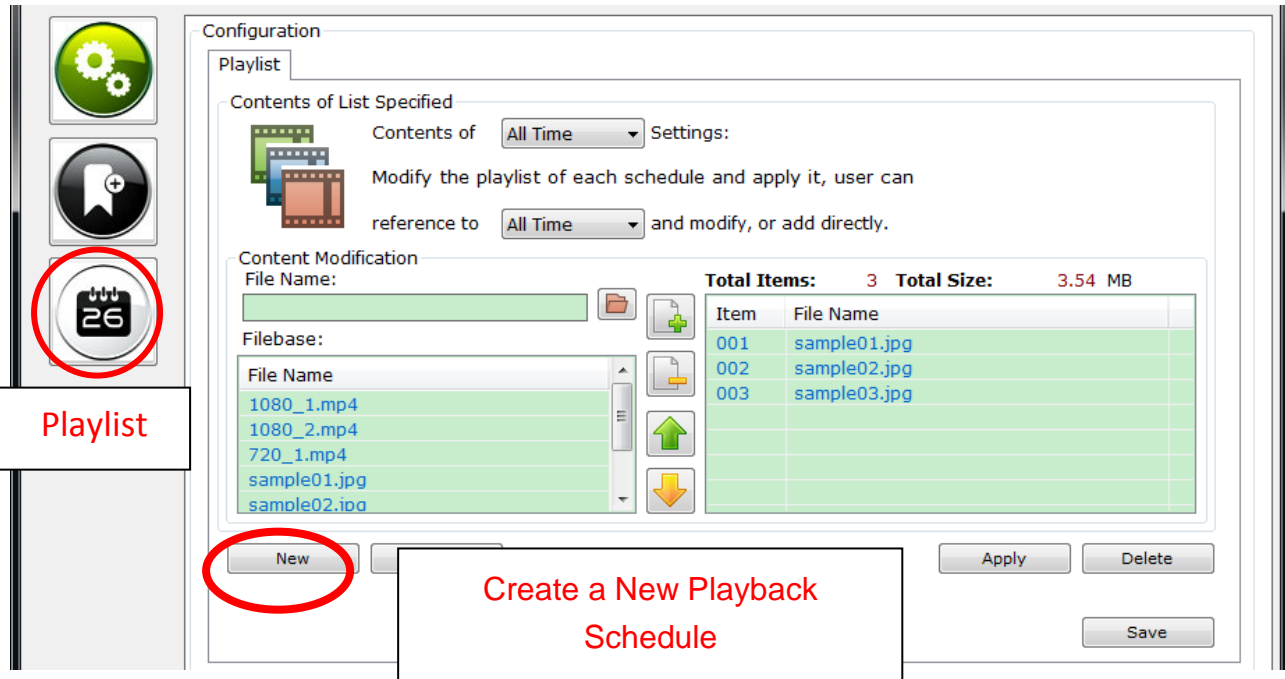

Click "New" to create new daily timeslot

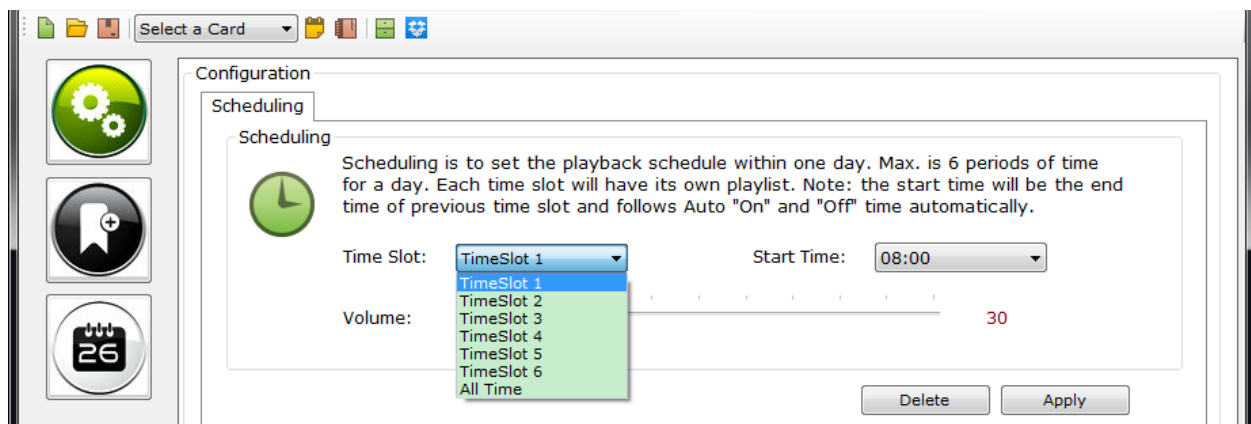

Just need to setup the "Start Time" and system will use the time of "Power Off" as default "end time" unless setting next "Start Time".

Eg.

TimeSlot 1

Play Time: Start from 08:00 to 9:30

Volume: 30

TimeSlot2


Play Time: Start from 09:30 to 20:00

Volume: 30

Configuration

Scheduling

Scheduling



Scheduling is to set the playback schedule within one day. Max. is 6 periods of time for a day. Each time slot will have its own playlist. Note: the start time will be the end time of previous time slot and follows Auto "On" and "Off" time automatically.

Time Slot: TimeSlot 2
Start Time: 09:30

Volume: 30

Delete Apply

List Board

Information List: untitled.playlist
List by: Time Slot

	Time Slot	Start Time	End Time	Volume
▶	TimeSlot 1	08:00	09:30	30
	TimeSlot 2	09:30	20:00	30

7.4 Signage Widget – Video I /Video II

◆ Playback Setting

■ Source Select <Video I>

UA-7200 provides “video input” but UA-7100 & UA-7000 don’t.

Please select the Video Source from the menu. “Video File” means playback from the SD or USB device and “Video Input” means display from external signal such as HDMI input or AV input. The selection of “HDMI In” or “AV in” is by internal jumper that will describe later.


And the supporting format of “HDMI In” & “AV-in” are

- HDMI In: 1080p/720p
- AV In:


■ NTSC/PAL

■ 480i/480p

Please use U-Poser to select playback by “Video File” or “Video In” as below:

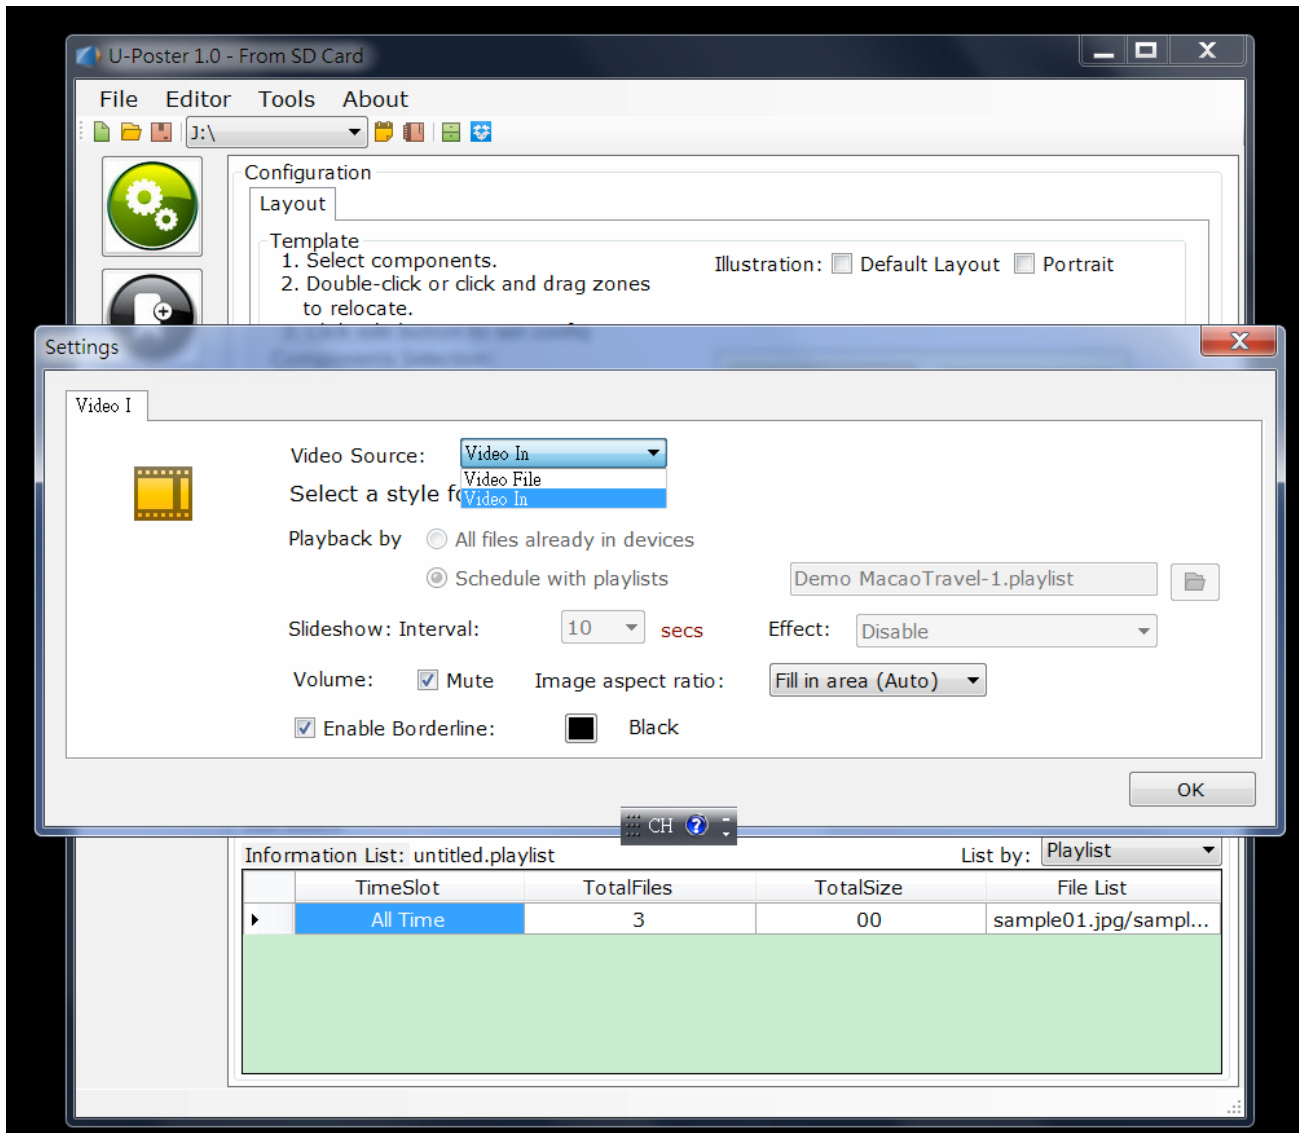


And please remove the default jumper (JP7) if you want to switch “HDMI-in (default)” to “AV-in”. Please refer to below:

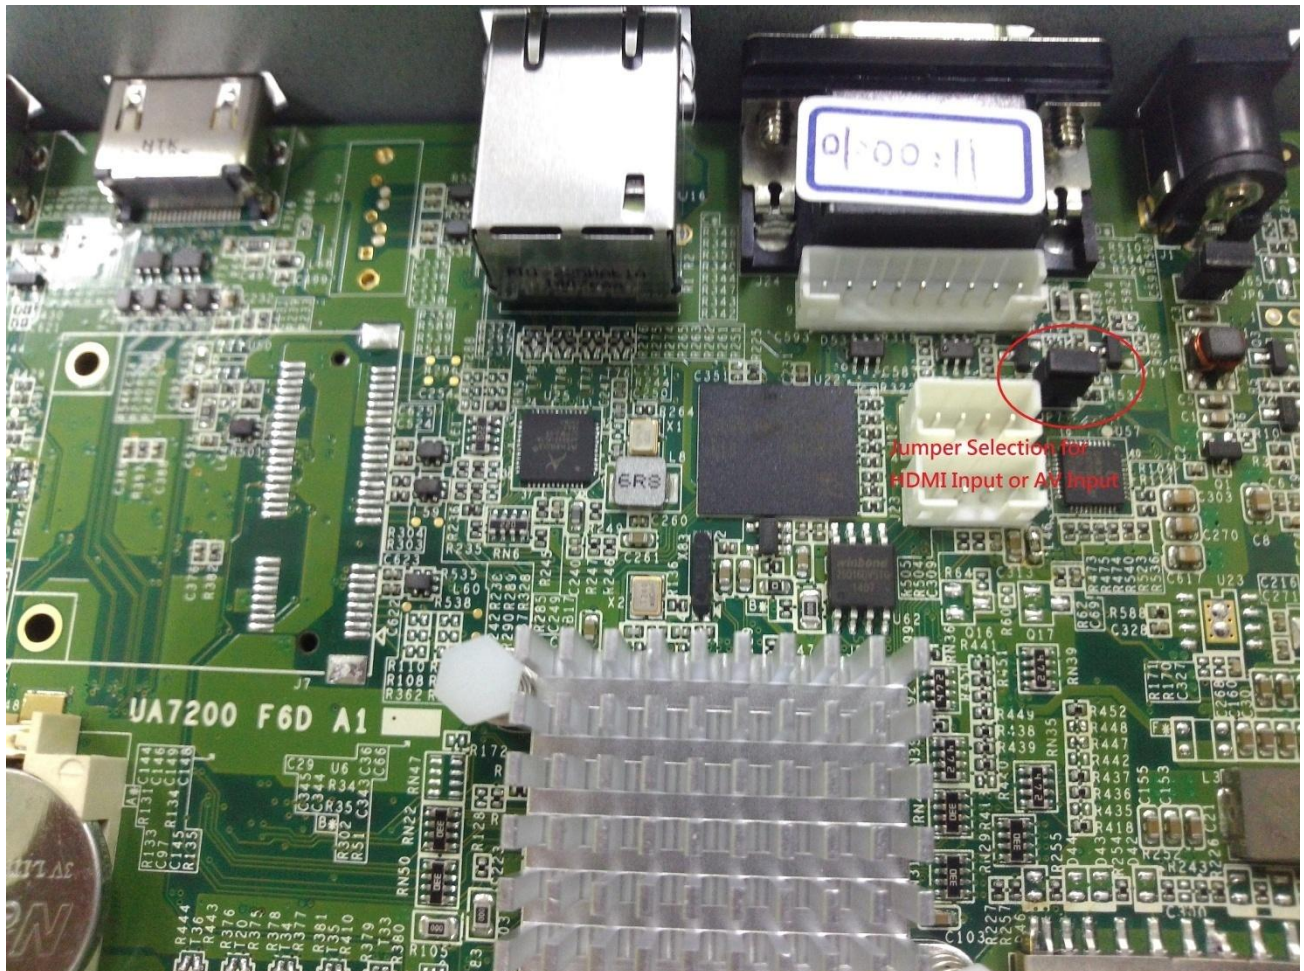


■ Play all files in Cards

Play all the contents in the Cards.

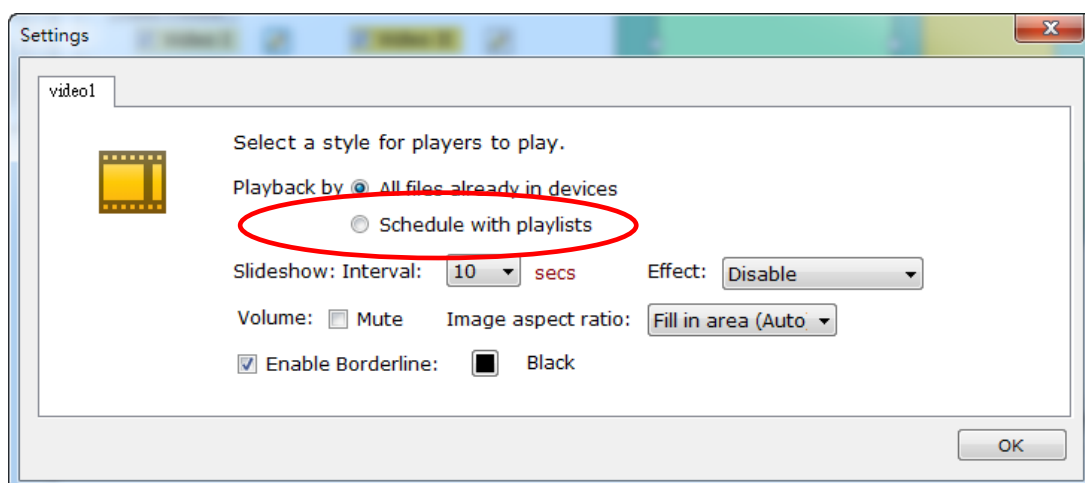

■ Schedule with Playlist

Select playlist to play

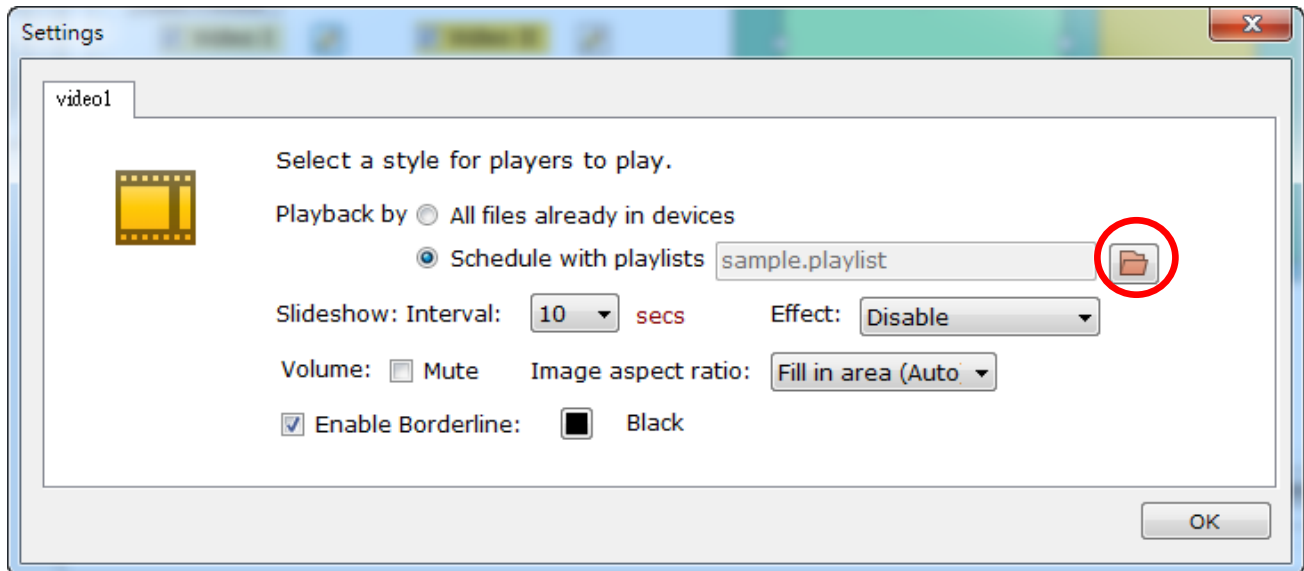

■ Slideshow Setting


◆ Internal: 5/10/15/20/25/30 seconds

■ Image aspect ratio

- Full in area : Stretch to fit the media zone
- Keep ratio: Keep the original aspect ratio

7.5 Signage Widget -- Marque I & Marquee II

You can select the "Text" source from "RSS" to "Message File".

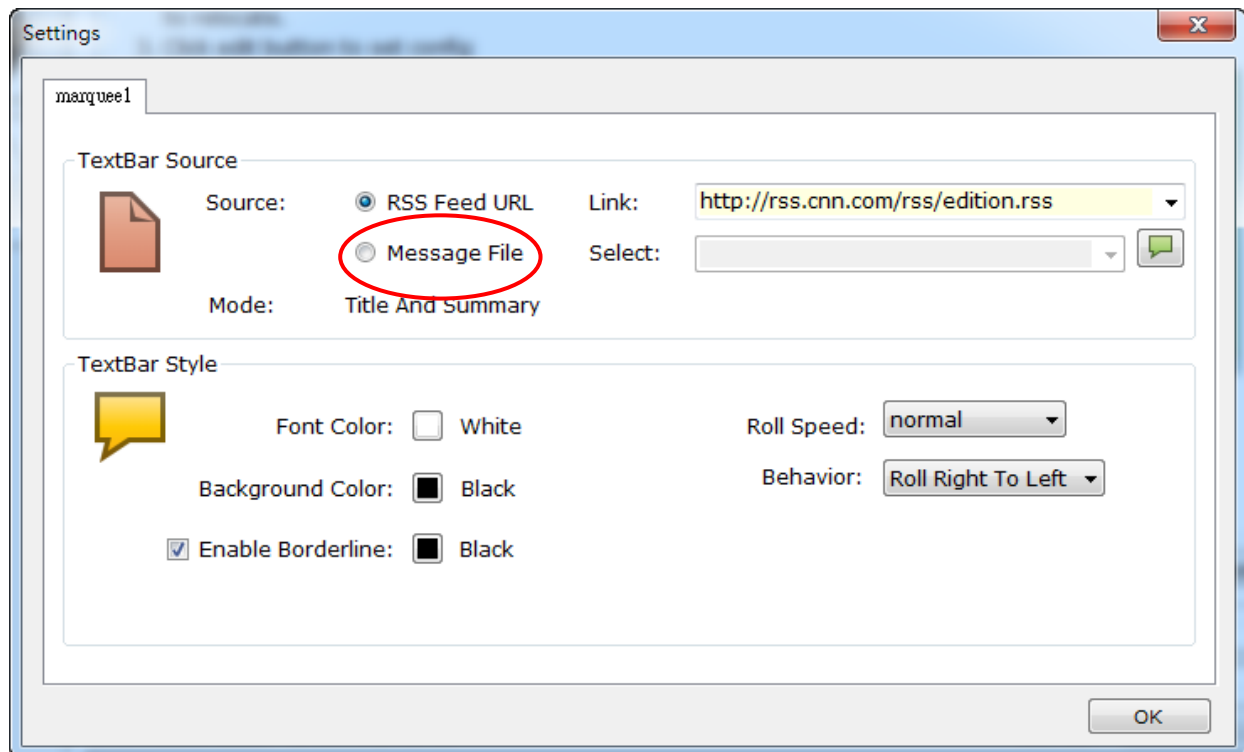


■ RSS

Enter the RSS Link behind

■ Message

Select a "Text File" for rolling text. Please refer Note2 for how to create "Text File".

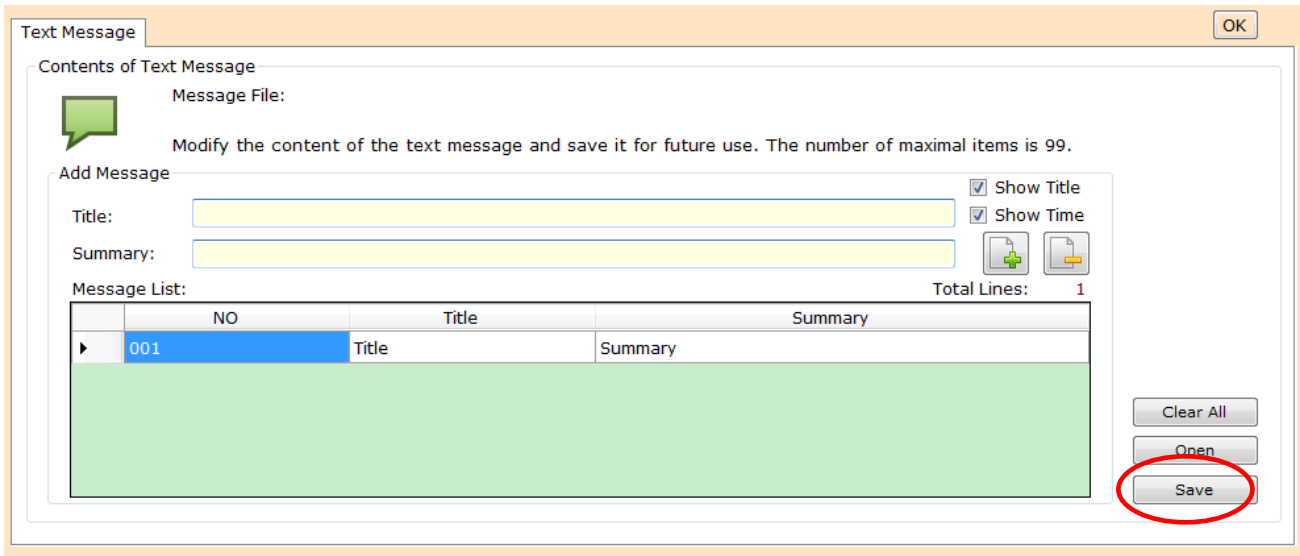


Click "Save" and "Ok" to exit.

Note1:

FTP server cannot accept "blank character" as the file name. There will have problem. Please be careful!!

Note 2:

You can use the Editor/Text Message to create the Text File in advance. Please refer to below screenshot:

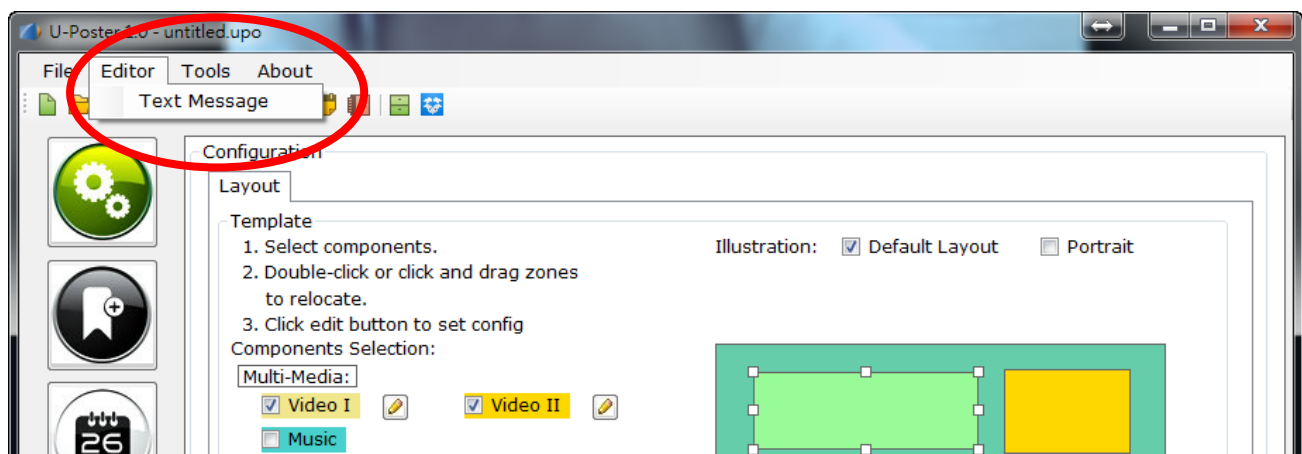


- Rolling Speed
 - Low : move 100 pixels at a time
 - Normal : move 200 pixels at a time

- Fast: move 400 pixels at a time
- Behavior
 - Roll Right to Left
 - Roll Left to Right


7.6 Signage Widget -- Web

Web Page Module can display the web content from internet or local disk. Please key in the URL link as below. And this browser widget also supports "HTML5" & "Flash" content to display.

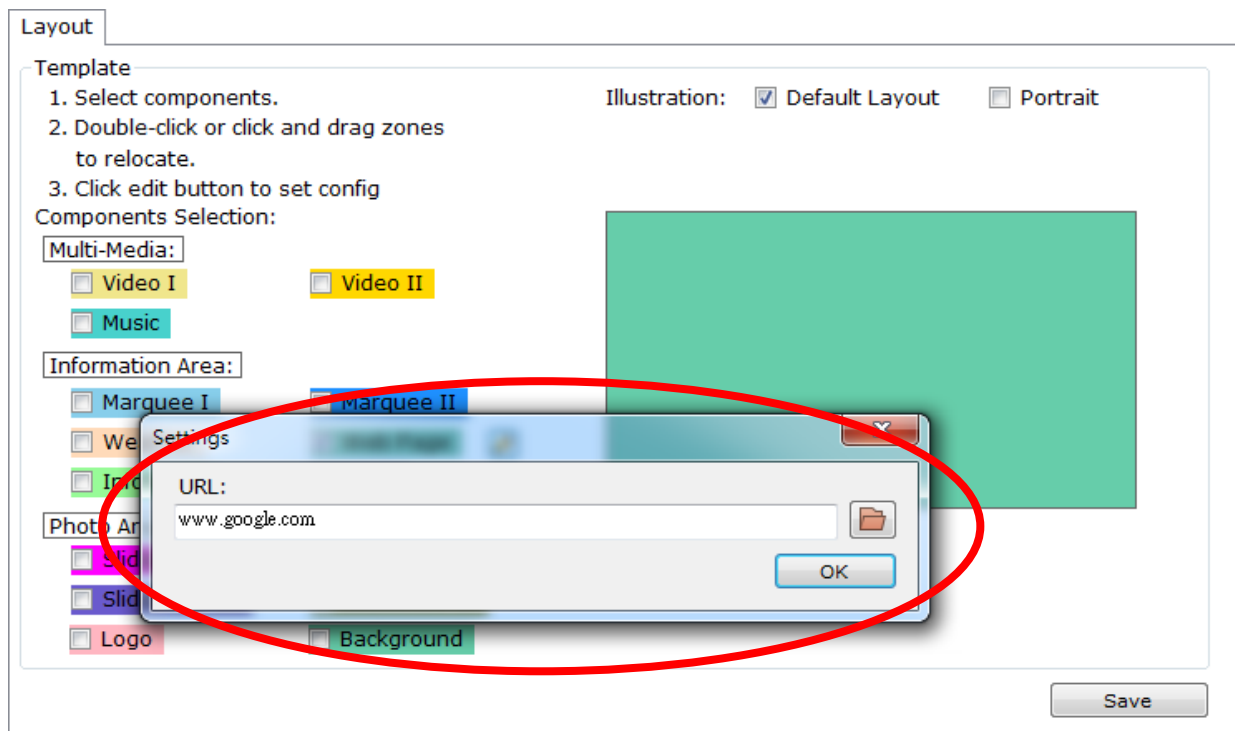


7.7 Clock

You can select the type of clock to be Analog Clock or Digital Clock. And it is ok to change the Font color and Background color of clock as below:

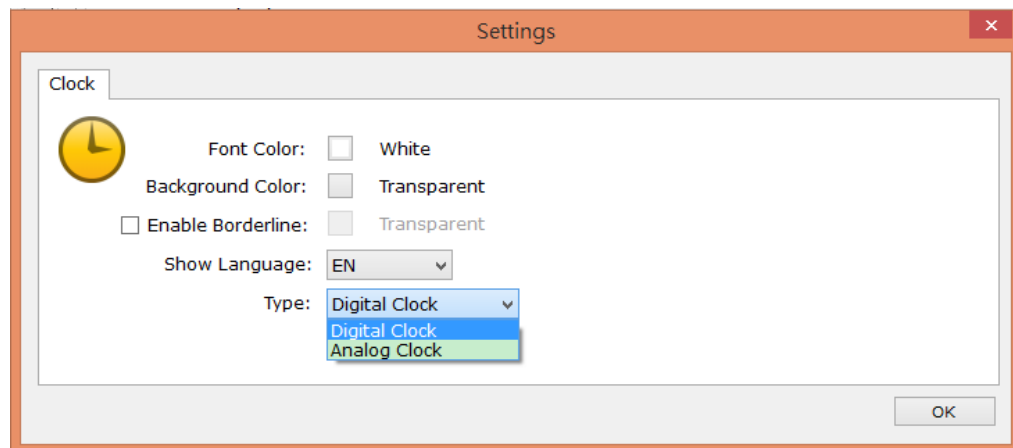


7.8 Weather

Weather information comes from “Yahoo Weather”. Please Click the link to get the weather zip code in the URL and enter the column.

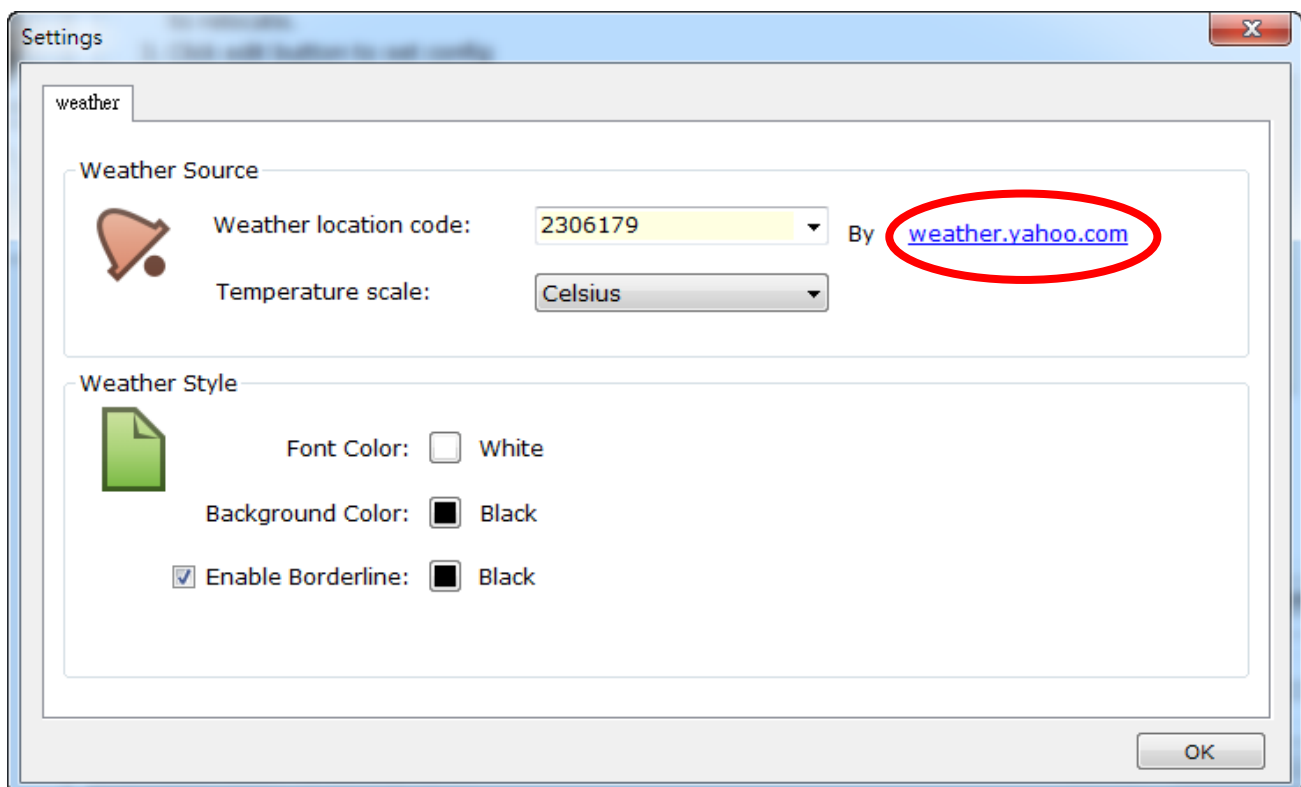

Example of getting weather zip code:

You can find the weather code of LA City is “2442047”.

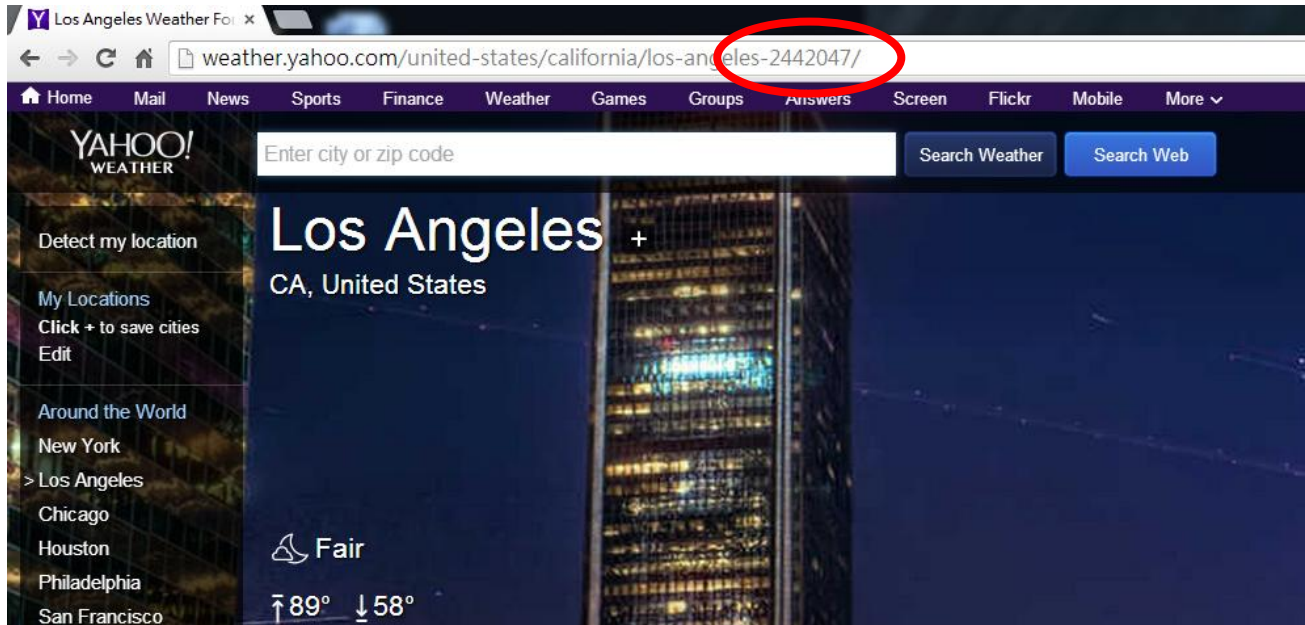


Please type “2442047” in the column.

7.9 Signage Widget –Infoboard (Bulletin Board)

Similar to TextBar Message but it's like a bulletin board. You can select the source from RSS or Text Message. And you can use the text editor to edit the content. And you can change the color of font and background.

The Main difference is that you can set how many lines you want to show in this Information Board.

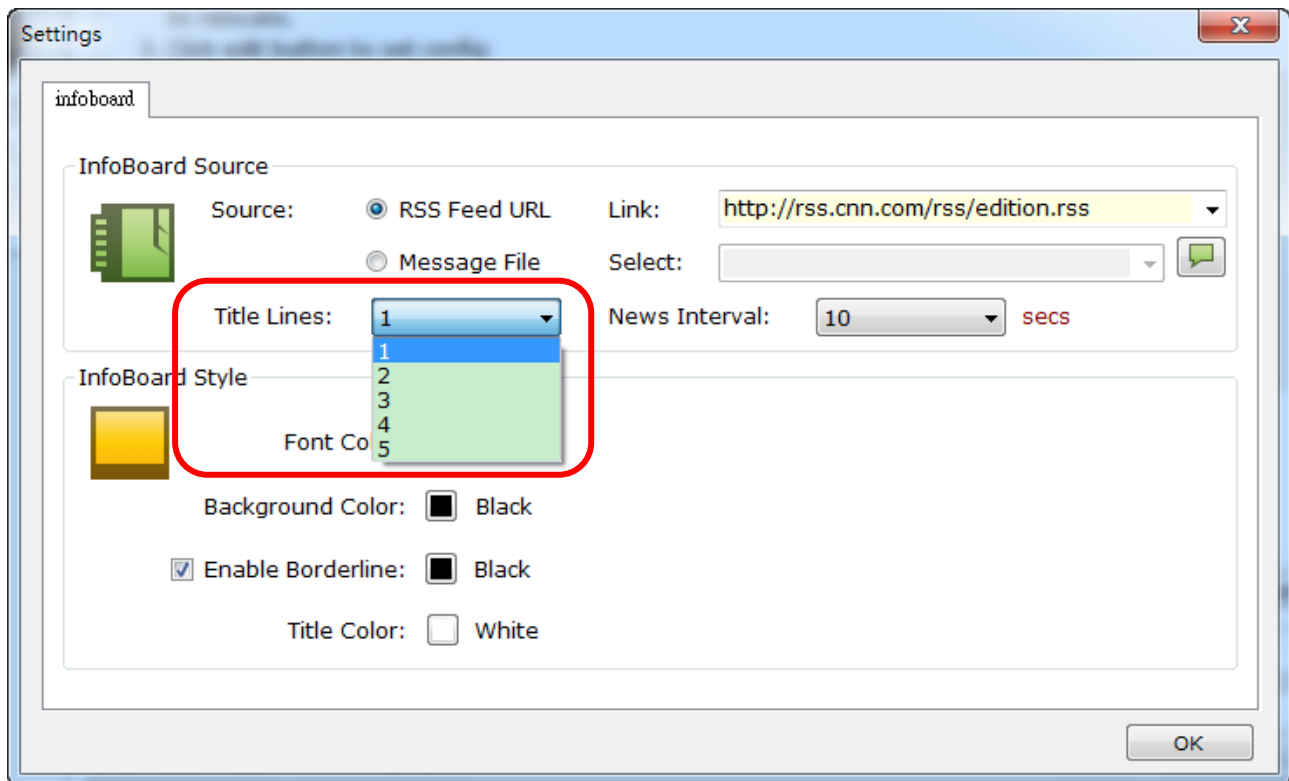

7.10 Signage Widget – Slideshow I ~ Slideshow IV


Select the photos that want to play. The playing sequence can follow the playlist or follow the “Alphabet Sequence” of File names.

And the other settings are:

- Interval
0/5/10/15/20/25/30/35/40/45/50/55/60 sec
- Effect
This is for Transition Effect which provide
 - Disable
 - Fade - In
 - Fade - Out
 - Fade - In + Fade - Out

Note:

Only Slideshow I/II support Transition Effect. Slideshow III/IV will disable Transition Effective automatically.

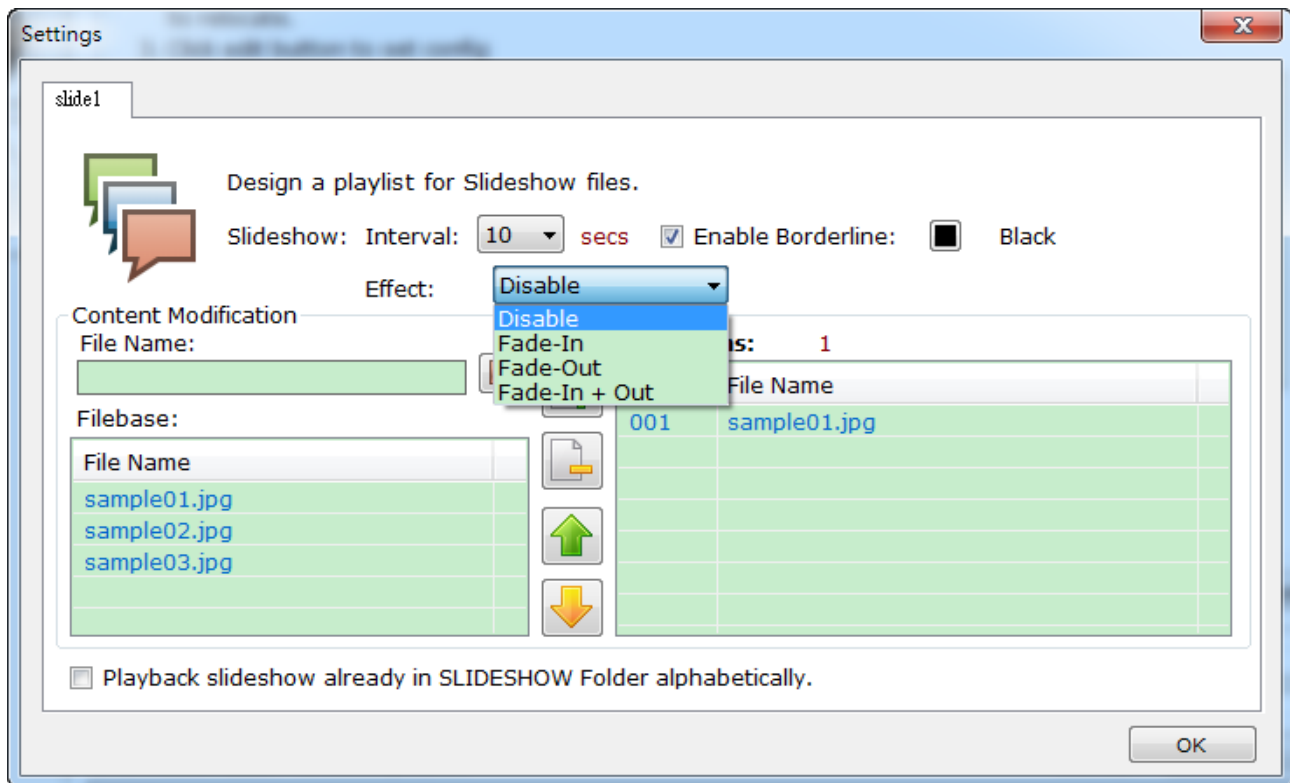


7.11 Signage Widget – Logo & Background

These two widgets are for logo and background photo. Please select photos as Background or Logo.

Notes:


“OnTop” means to display on the top of other signage widgets.

In background widget, it will behave like “Foreground”. Please prepare this “Foreground” photo in “.png” format with transparent effect in what you want to display behind.

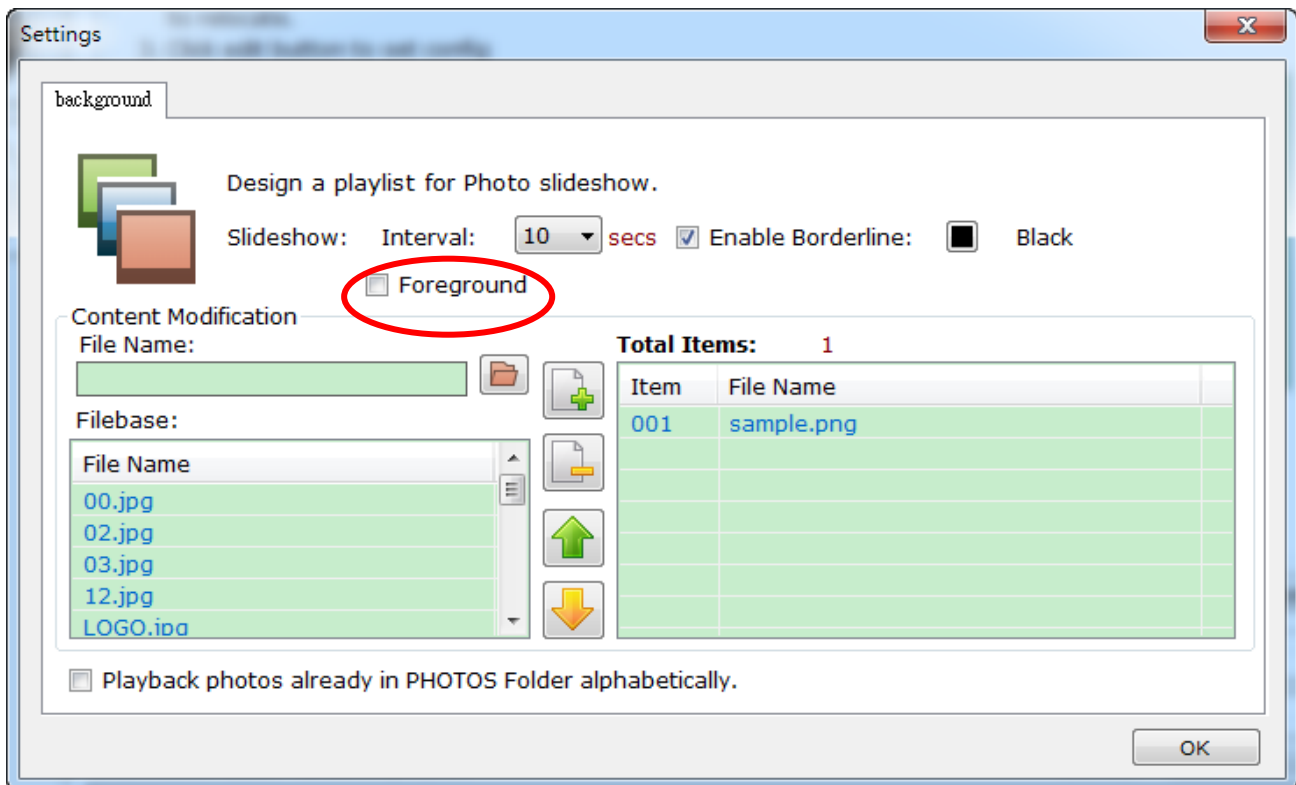

7.12 Signage Widget – Music


This widget is for music playback. Please select the music files from the file browsers. The current limitation is 20 songs.

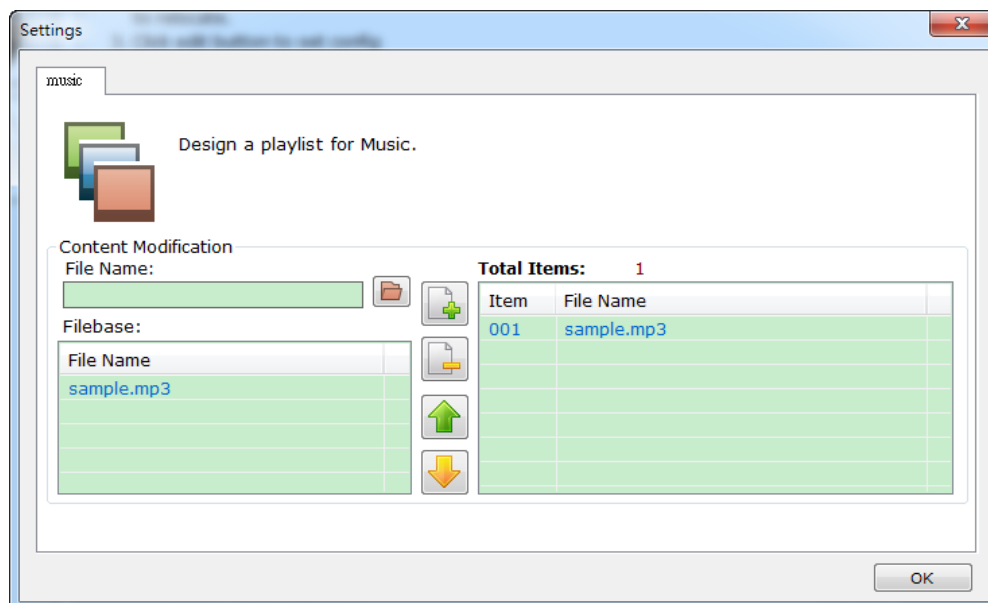

8. Publishing Digital Signage

This portion will let you know how to export and publish contents.

8.1 Hot Key Area

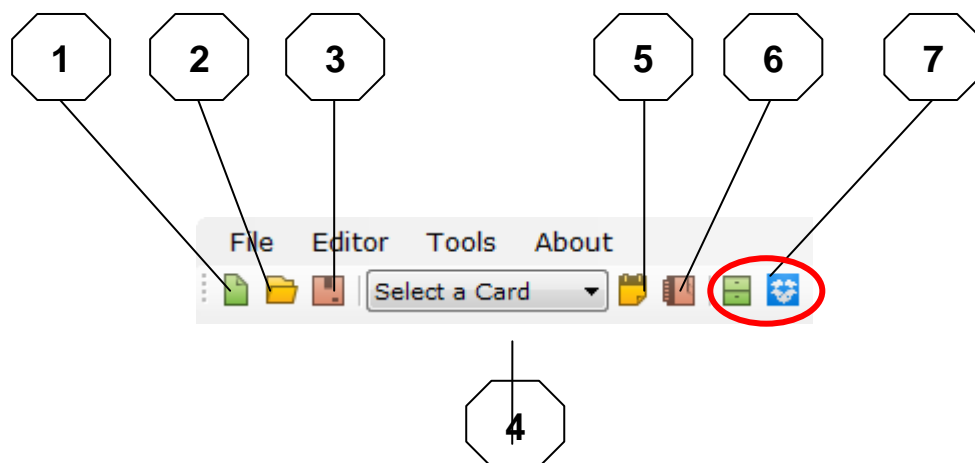

#1. New: Create a new project for signage players

#2. Open Project: Open a signage project already existed

#3. Save: Save configurations as a signage project

#4. Select a SD device to export the signage project

#5.Import from Disk: Open a project which is in a selected SD card/USB storage

#6. Export to Disk: Export current project (w/ contents) into SD card/USB storage

#7.FTP/Dropbox Upload: Save project or files to FTP server or Dropbox

(Please refer to “Chapter 9” for detail FTP operation steps)

Insert saving finished SD card into player and player playback digital signage automatically.


9. FTP Detail Setting and Information

9.1 Local FTP setting


This function will let you deploy content to signage easily on locally without additional FTP server.

◆ Add user account


- Right click on U-Poster1.0 icon of task bar

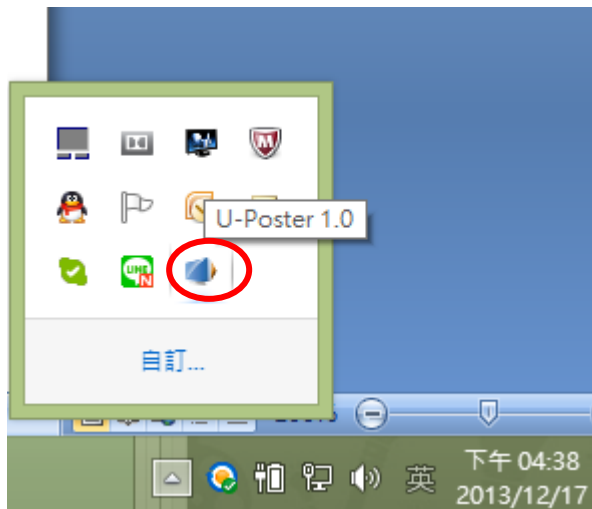

- Select FTP Settings /User Account

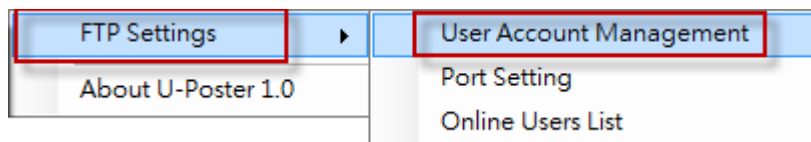


- Add/Modify/Delete user accounts

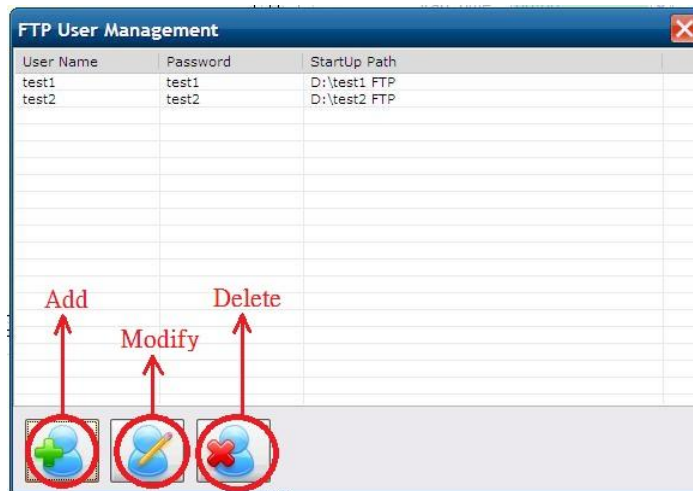


◆ Appoint FTP port

- Right click on U-Quick 2.0 icon of task bar
- Select FTP Settings /Port Setting

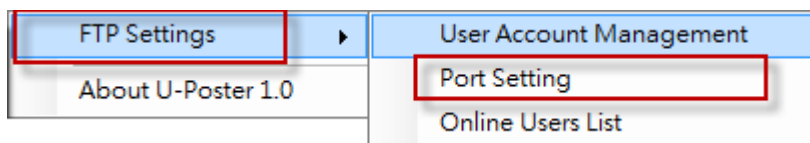


- Edit port number (Default value: 21)

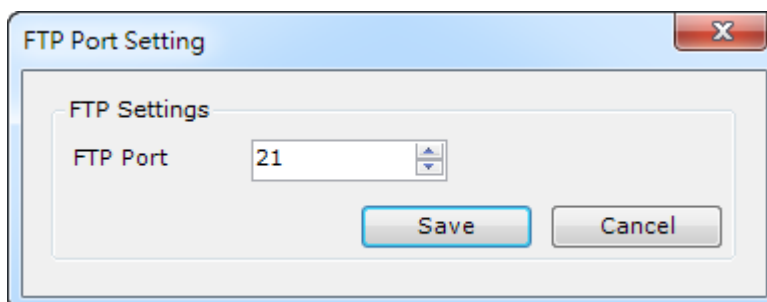

9.2 Upload project and files to FTP

- ◆ Click FTP icon as indicated

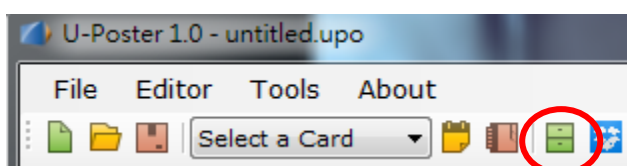

And it will pop a new setting page as below:

“FTP Upload” Area will allow you to upload “Content ” or “APK Software”.



Data Upload

"Content Mode" is to upload all the content (with configurations) to Dropbox for players to sync and "APK Mode" is to upload signage software (apk) for players to upgrade the system.

☒ Content Mode (sync current project to Dropbox directly)

☐ APK Mode (signage player APK upgrade via Dropbox)

File Name:

Sync all the contents and setting related to this project

Upload specific apk file for player software upgrade

If using Content Mode (Upload specific media to FTP), please make sure the directory you want to upload. e.g.

- video folder is for the main media zone1
- slide folder is for Slideshow photos
- music folder is for music

FTP Upload OK

FTP Upload is used for connecting between U-Poster and user's FTP site. Users can upload designed project and media files to FTP directly.

FTP Sync

☐ Use Local FTP ☒ Use Remote FTP



ftp:// : User Name: Password: Reset OK

Data Upload

Choice 'Sync Mode' to upload project to FTP with delete all the files in FTP. Or upload specific media without deleting by choice 'Simple Mode'.

☒ Sync Mode (sync current project to FTP directly)


☐ Simple Mode (upload specific media to FTP)

File Name:  


FTP File List

Folder:

File Name	Folder
.signage	root
config.xml	root
infoboard	root
localclock	root
marquee	root
music	root
photo	root
slide	root
	video
	video2
	slide
	photo
	music
	DIR
	DIR
	DIR
	DIR
	DIR



Folders in SD or ftp server.

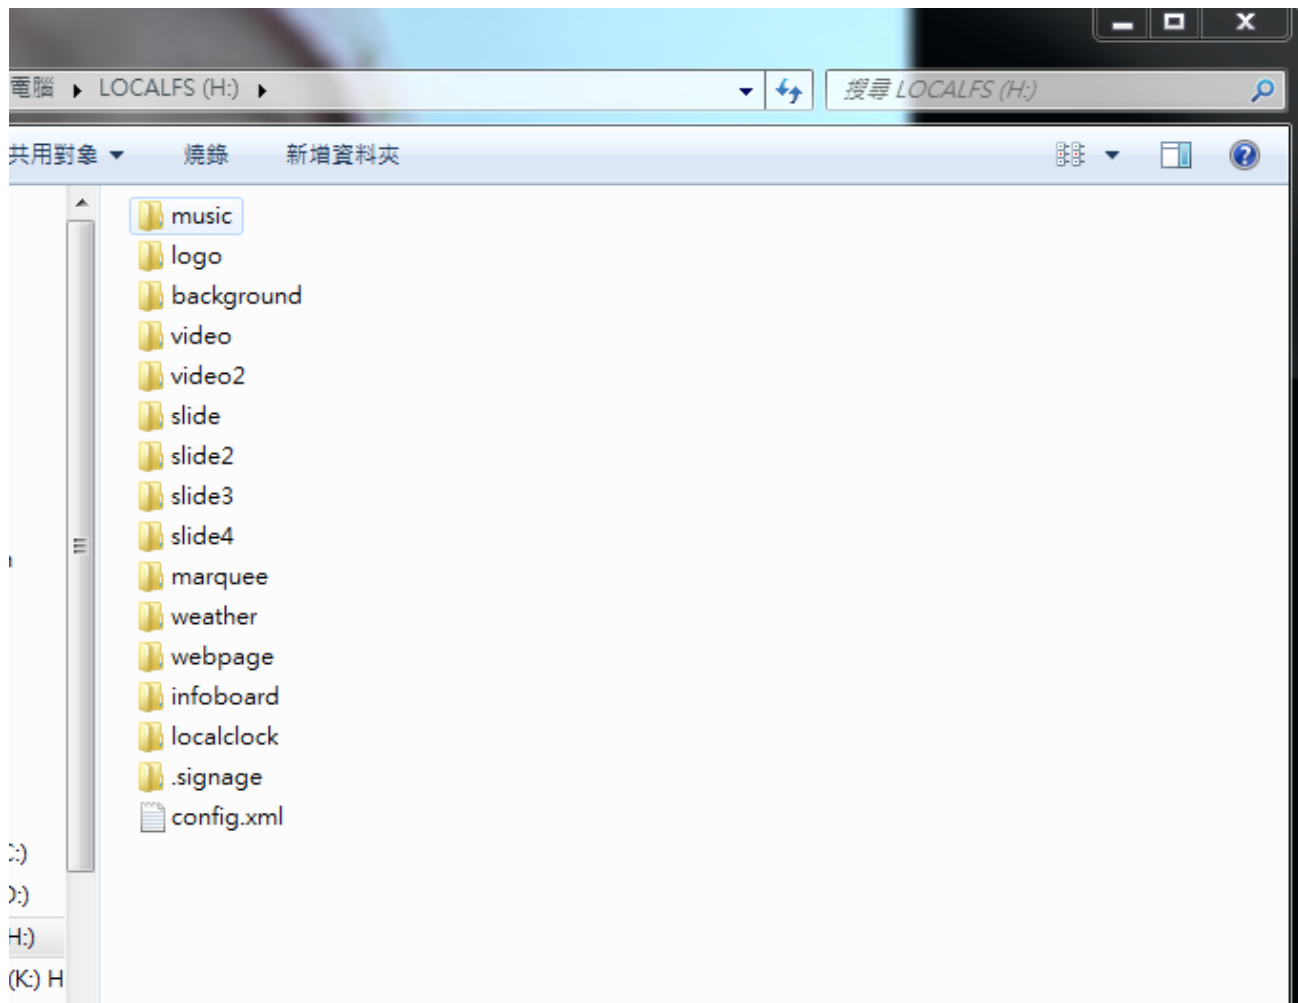

Notes:


1. FTP server cannot accept "blank character" in the file name. Please check the file names you want to play. It is ok for "_" or "-" instead of "blank character".
2. If there has problem to connect with "Local ftp", please check with your firewall for allowing U-Poster to access.
3. Please make sure that your PC (w/ U-Poster) is working (not in stand-by mode) during sync.

9.3 Other FTP management


◆ Online users list viewer (Local FTP)

- Right click on U-Poster1.0 icon on task bar

■ Select FTP Settings/Online Users List

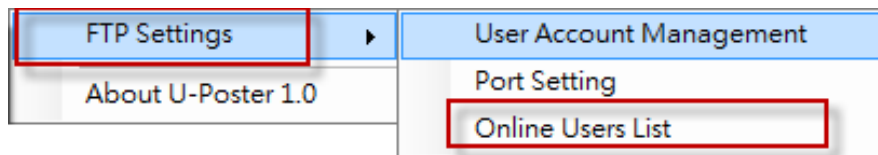

■ View online users' state

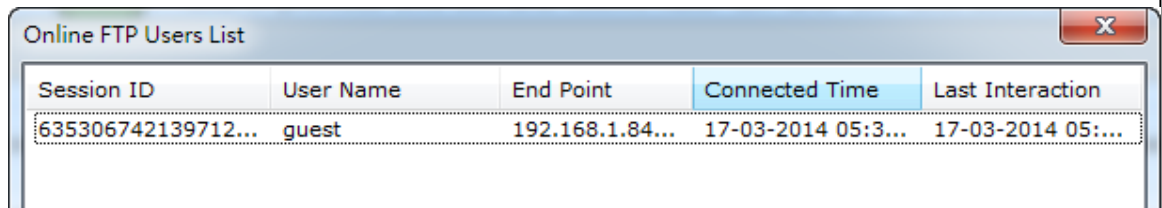

10. Publish via Dropbox

This portion will let you know how to publish contents via Dropbox


10.1 U-Poster Upload (to Dropbox)

Step 1: Click Dropbox icon as below:



Step 2: Select "Enable" and enter the Folder Path.


Then, Click "Connect".

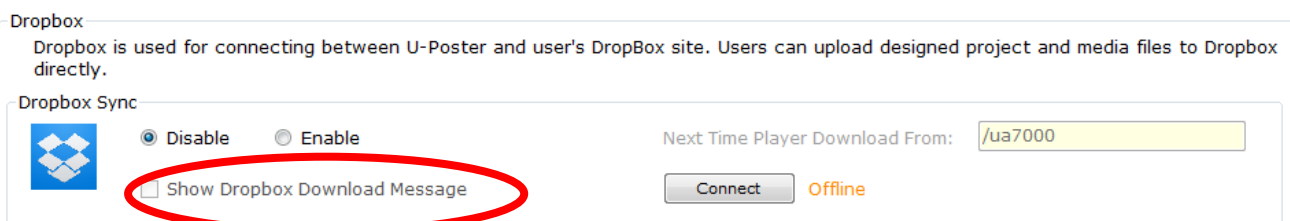


PS:

1. U-Poster will automatically create the folder in dropbox which enter in "Folder Path"
2. You can get the background download status if click "Show Dropbox Download Message".

Step 3: After Click "Connect", it will show the login page for allowing U-Poster to access Dropbox. Please log in!

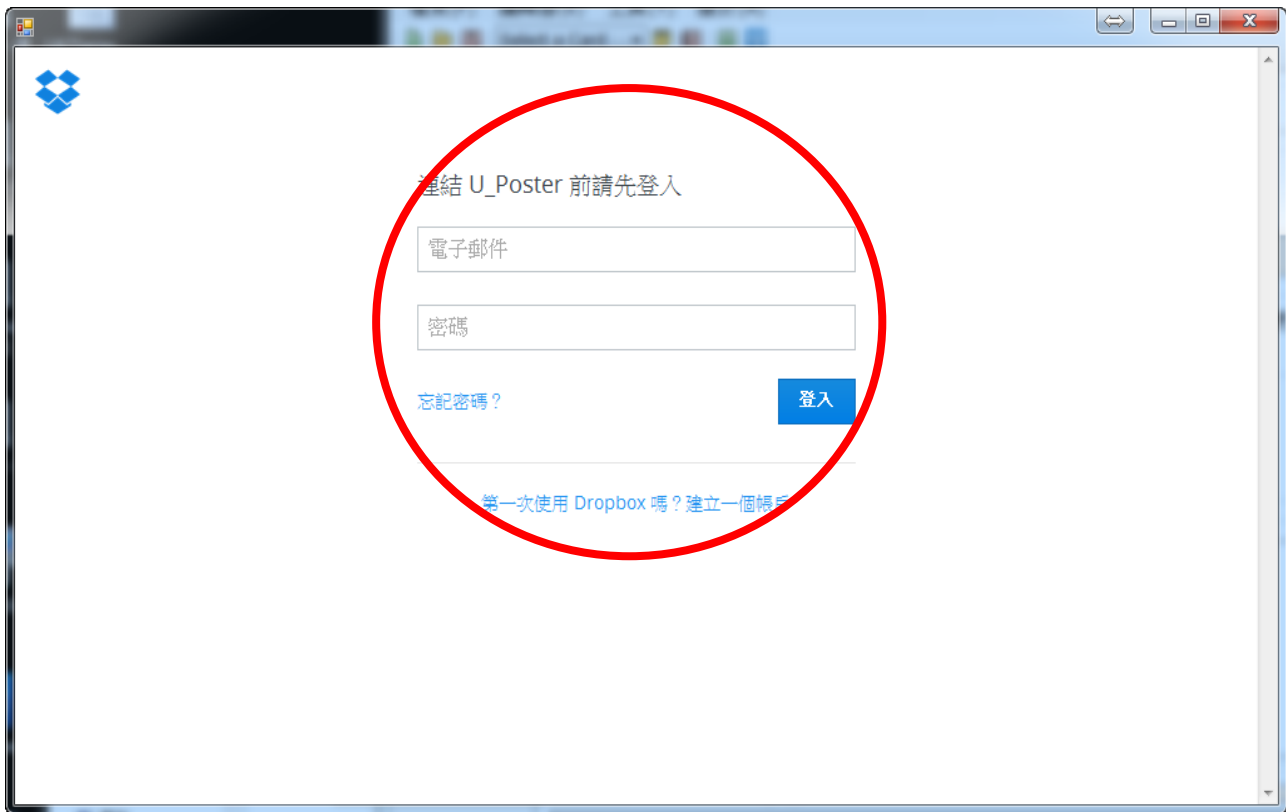

Step 4: Click "Accept" to allow

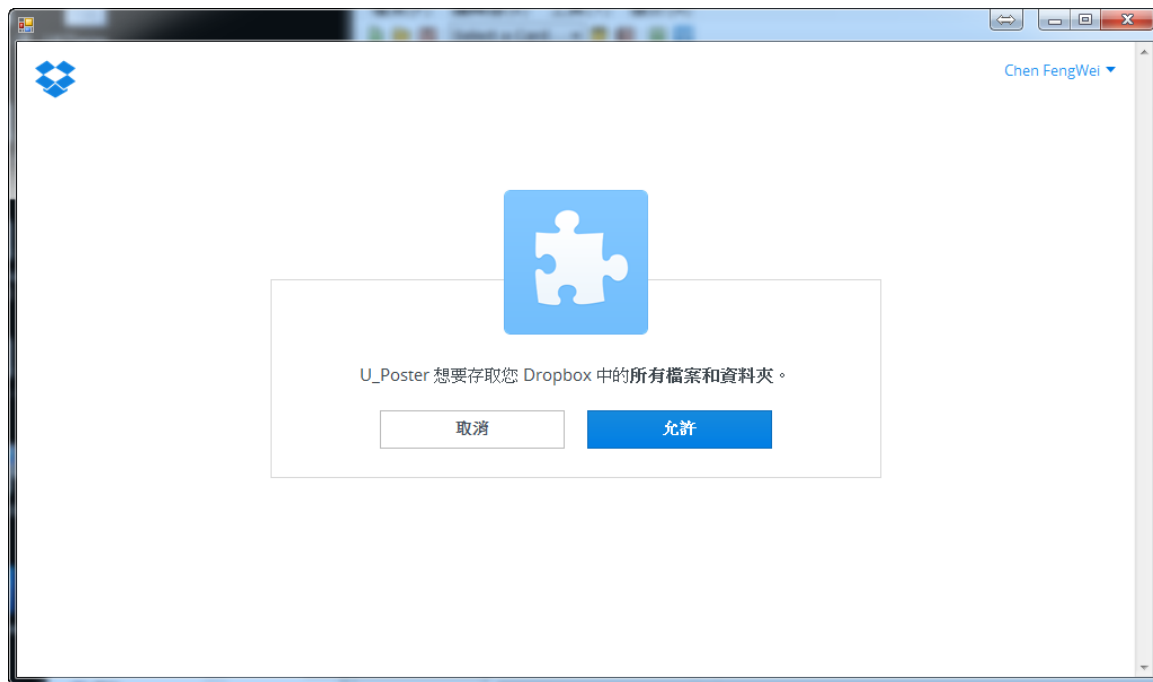


Step 5: Select "Data Upload" mode for Sync.

Content Mode:

Upload whole project including layout configuration, signage configuration (such as rolling text, clock, time zone and so on) and contents to Dropbox Folder


APK Mode:

Upload specific signage apk to upgrade the player software.

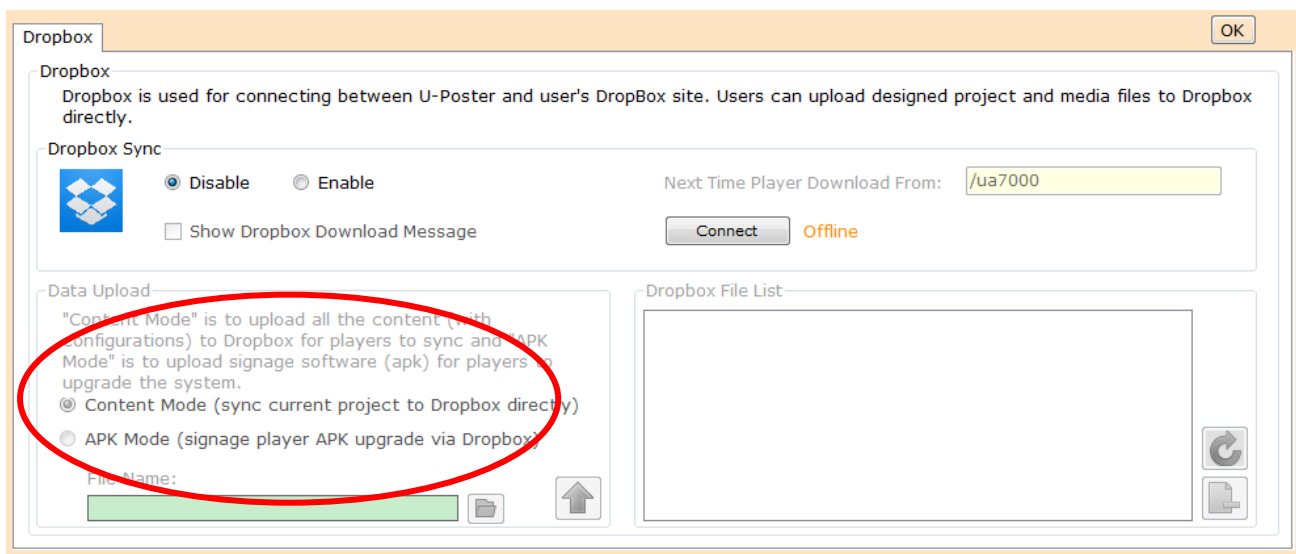


Step 6: Click "Upload Icon" to upload, "Delete Icon" to delete and "Refresh" to check

content on Dropbox folder.

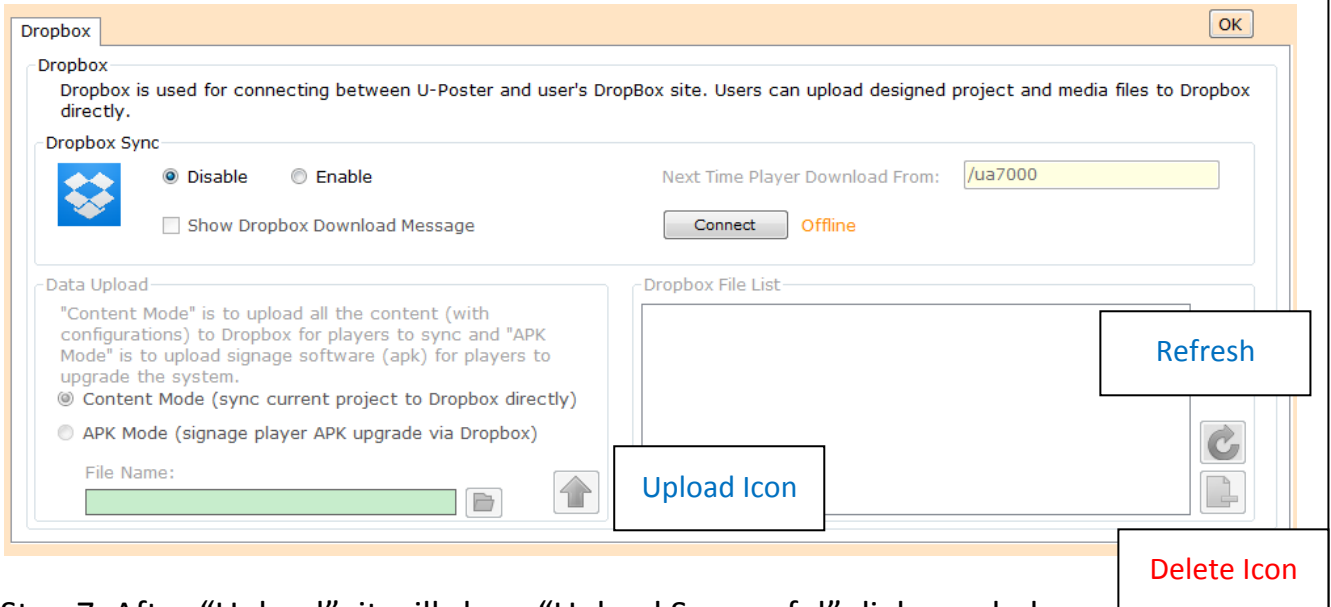

Step 7: After “Upload”, it will show “Upload Successful” dialog as below.

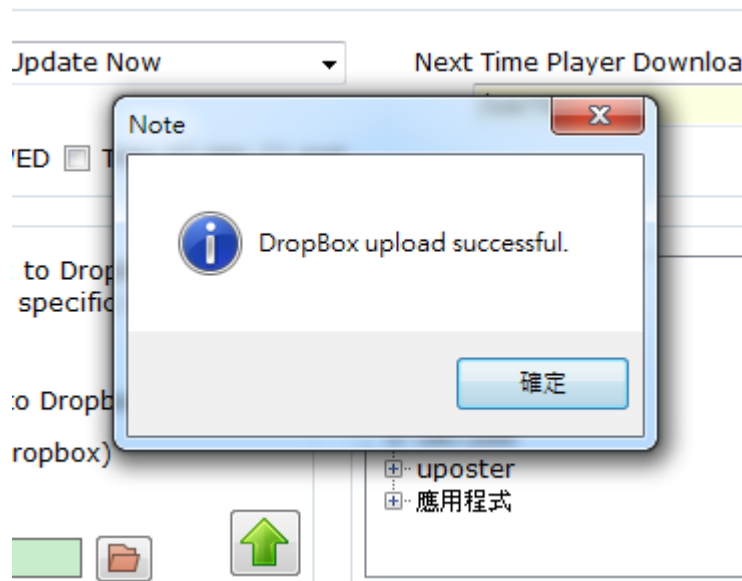

Step 8: If Upload successfully, players will start to sync.

10.2 Dropbox Setting in Player (UA-7200)

10.2.1 Enable Dropbox at Installation

Players will remind you to enable Dropbox if you enable Dropbox from U-Poster (please refer to 10.1 that you export to SD card). Please refer to the following

screenshot. This dialog will display during the 1st time unless you unlink or change to other Dropbox account. And there will need mouse and keyboard for typing the username and password of Dropbox. Therefore, please connect to mouse and keyboard during installation and initial setup.

Step 1: Click “Link with Dropbox”

Dropbox Link (5.3.1)

Please click 'Link with Dropbox' button!




Link with Dropbox

Step 2: Type the Username & Password and click “Login”



Step 3: Click “Accept” for allowing players to access your Dropbox account

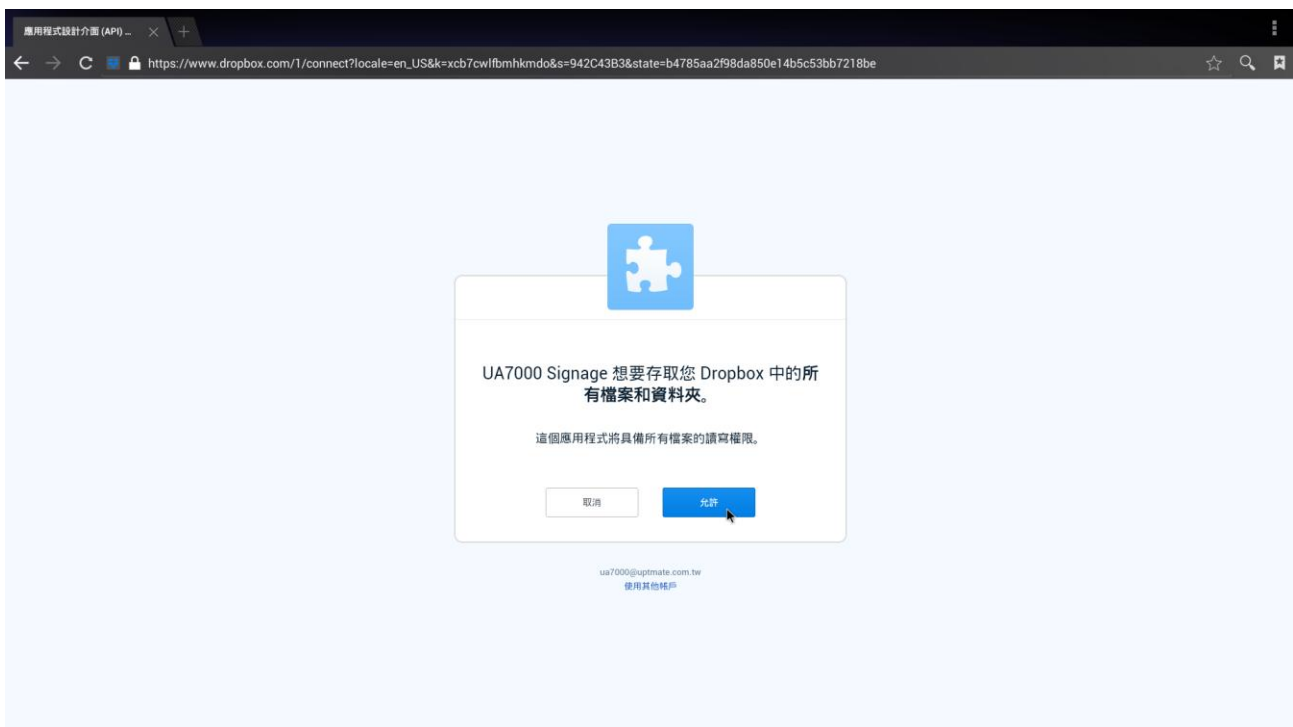

After successfully connect to Dropbox, players will start to sync all content and

configuration from the Dropbox folder. Players will start to play after synchronization. And players will check any update from Dropbox every 5 sec. If anything new, players will sync again.


10.2.2 Unlink from Dropbox

It's possible not to sync with Dropbox by condition. Just unlink that specific player from the Dropbox. Please refer to the procedures as below:

Step 1: Click "Dropbox" icon at App Manager (Desktop)

Please back to App Manager (Desktop) by "right click" the mouse or "ESC" in keyboard. You can find a "Dropbox Icon" at right-bottom corner as below.

Please click the "Dropbox Icon".

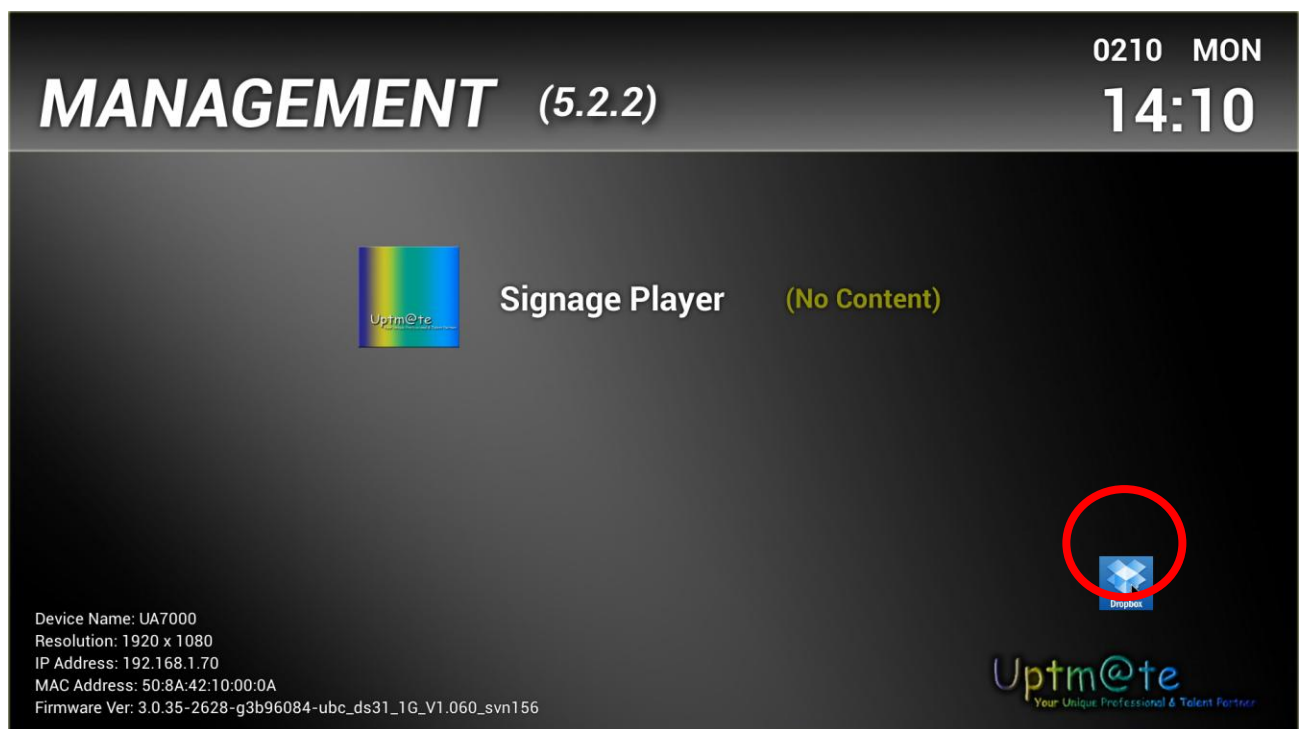


Step 2: Click "Unlink from Dropbox"

Click "Unlink from Dropbox" and this player will not sync with Dropox again.

Dropbox Link (5.3.1)

Please click 'Link with Dropbox' button!

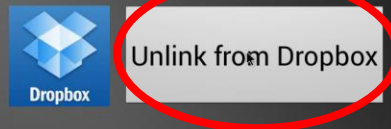

10.2.3 Changing Dropbox account

It's possible to change the Dropbox account at player side and sync with the new account. But the folder name to sync must be the same as what U-Poster assigns in the SD card. Please follow the procedure as below:


Step 1: Please "Unlink from Dropbox" (refer to 10.2.2) and click "Link from Dropbox" as below:

Dropbox Link (5.3.1)


Please click 'Link with Dropbox' button!




Step 2: Please select "login from account" as below:

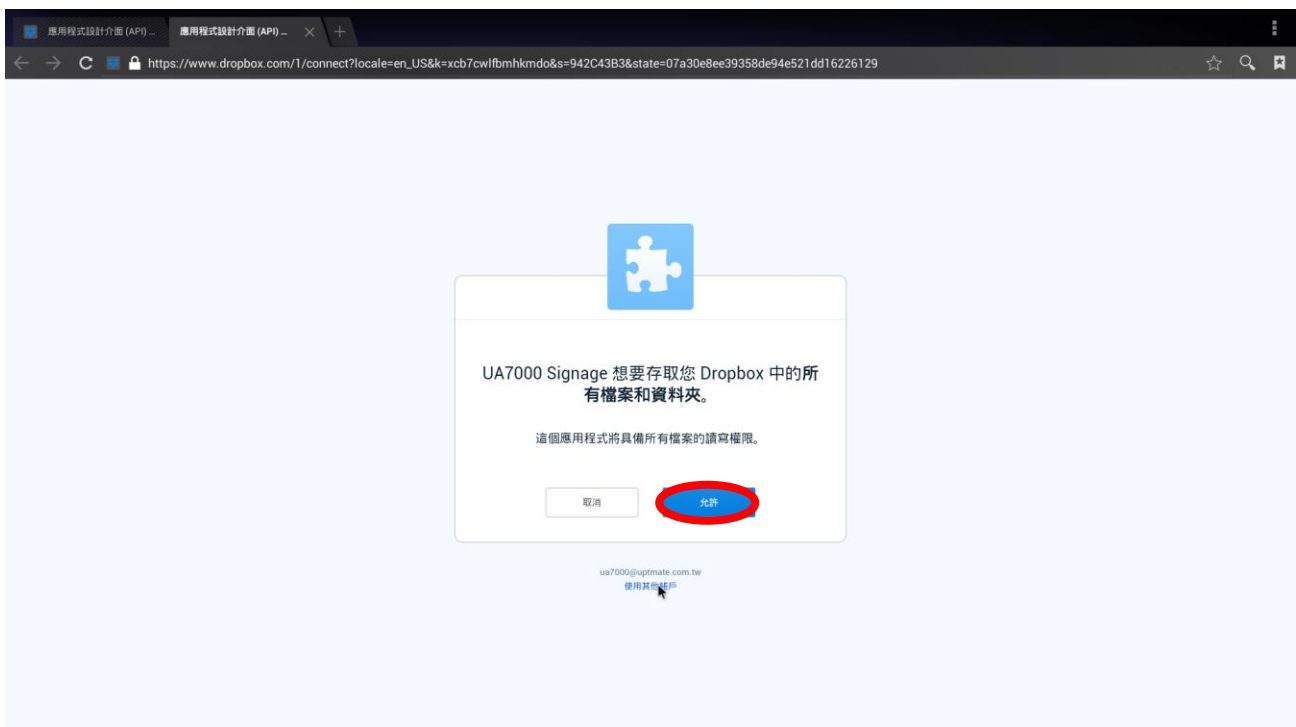

Step 3: Type the Username and Password and click "Login"

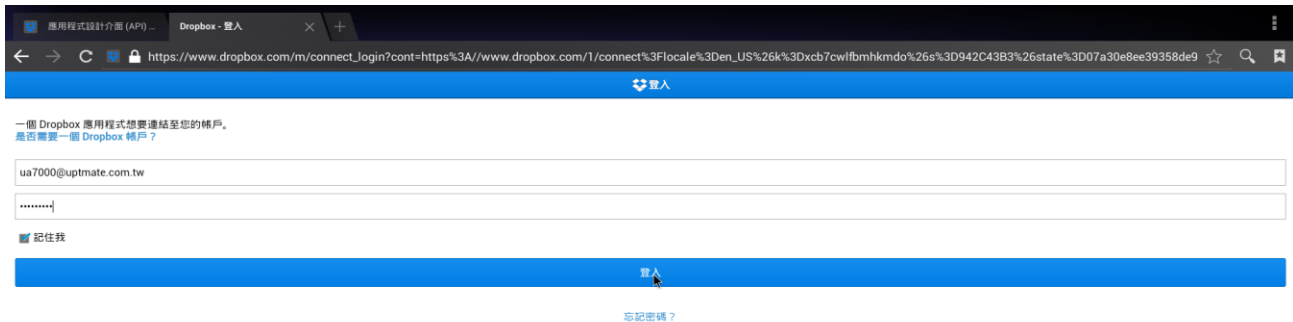

Step 4: Click “Accept” and finish “changing the Dropbox account. Players will start to sync with new Dropbox account immediately.

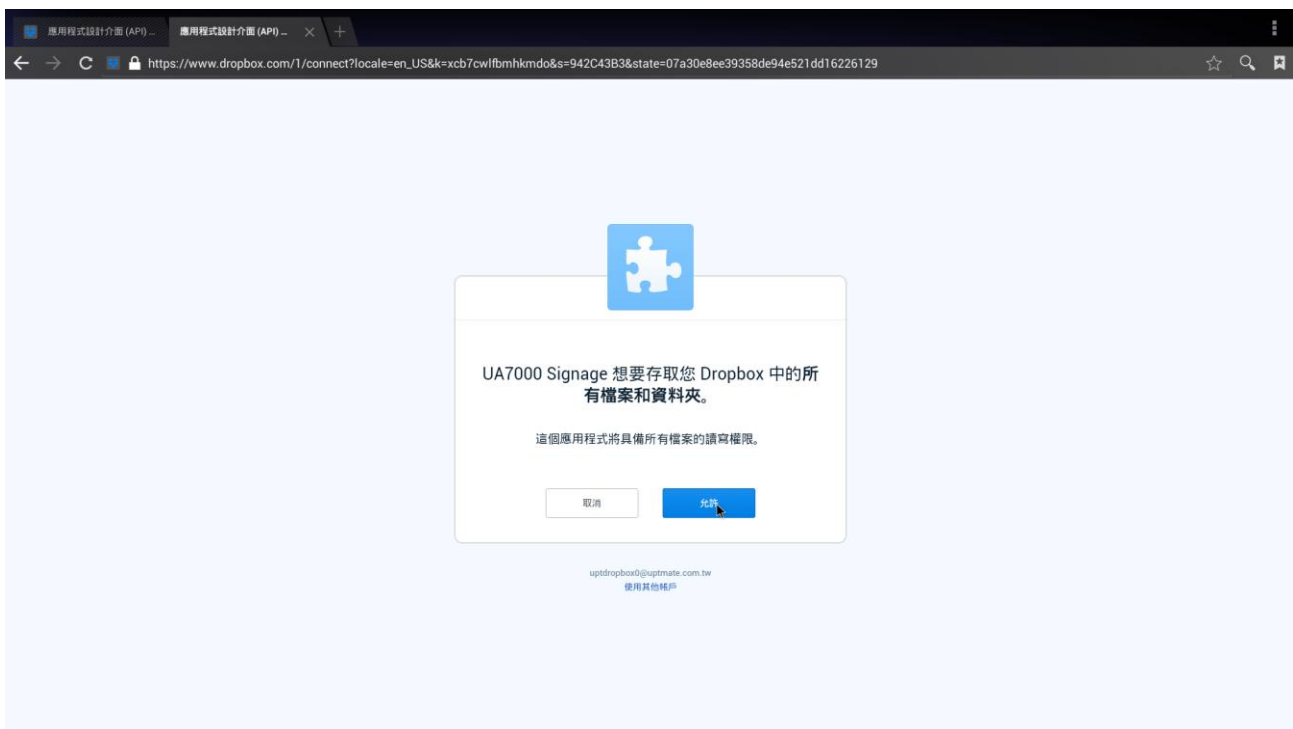

<<Thanks for your reading>>